



Semi-cassette awning

markilux 1600

The awning with excellent design features and well-thought-out mechanics.




markilux.com

markilux
safe timeless beautiful

Product Characteristics

Wind resistance class 1 | 2 (depending on size)
Beaufort 5 → 28–37 km/h → 7,5–10,4 m/s

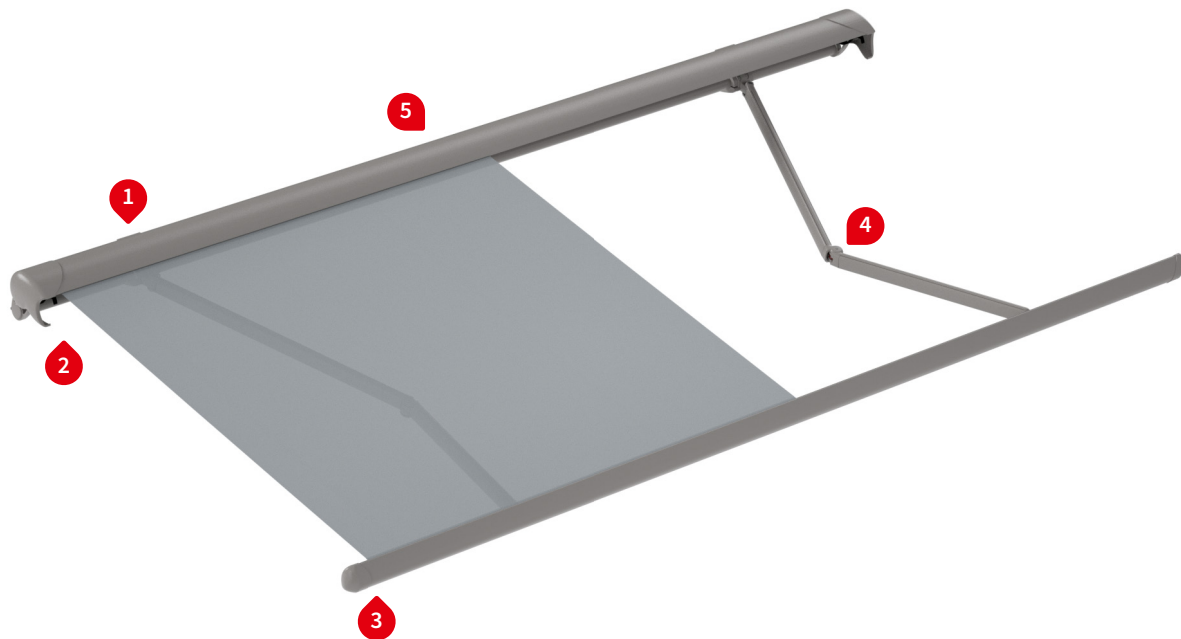

1 face fixture




1 face fixture, maximum pitch of 50°




1 top fixture



2 retraction phase

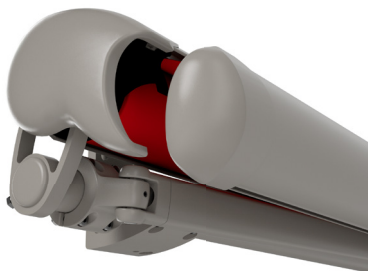

3 shadeplus, during extension ¹⁾

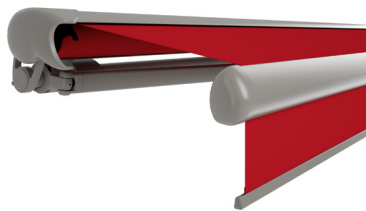


4 twin steel-link chain, corrosion protected



4 bionic tendon made of high-tech fibres for optimum power transference ¹⁾



4 LED Lines in the folding arms ¹⁾

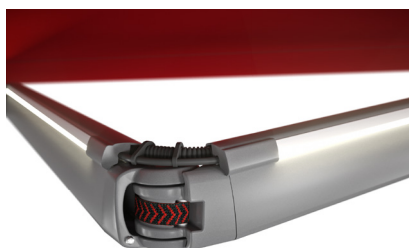

5 wall sealing profile, up to a pitch of 25° ¹⁾



¹⁾ Optional accessories

Product Characteristics

Description

- the folding-arm awning with exceptional, organic design characteristics and pivoting coverboard, ideally suited for shading large areas

Special features

- the dynamically rounded coverboard gives it the appearance of a full cassette awning
- during the closing procedure, the coverboard tilts automatically down the given pitch of the awning and together with the front profile encloses the roller tube completely (the awning is open underneath)
- coverboard with integrated brush so that debris does not get dragged into the awning as it closes
- option of shadeplus up to a projection of 350 cm – vertical protection against low-lying sun and inquisitive glances integrated into the front profile, can be operated by radio remote control
- optional wireless io-dimmable LED Line lighting in the folding arms which provides uniform illumination under the awning
- awning with an extremely torsion-resistant, round torque bar which gives a certain degree of flexibility when choosing the fixture points

Dimensions

- cassette in the standard version: depth 254 mm, height 223 mm
- single unit: minimum width 174 cm at the smallest projection of 150 cm, maximum width 710 cm at the largest projection of 400 cm
- also available as a coupled unit

Roller tube and lateral bearings

- round roller tube Ø 85 mm with keyway, galvanised steel – excellent stability, ensures near perfect cover performance even at the largest widths
- the roller tube support bracket is made of extruded aluminium, powder coated, visually masked by the coverboard end cap

Awning profiles

- extruded aluminium, in façade quality, powder coated
- oval, single-piece coverboard, pre-fitted, enclosing the awning from behind and above
- semi-circular front profile becoming one with the coverboard when retracted
- round torque bar Ø 50 mm, galvanised both inside and out, powder coated

Folding arms

- profiles in extruded aluminium, in façade quality, powder coated
- moving parts made of drop-forged aluminium – the arms are therefore extremely fracture resistant
- pivot bolts in stainless steel run in Teflon-coated bronze bushes – practically maintenance free, virtually silent and extremely hard wearing
- power transference via corrosion-protected twin steel-link chains at the elbow joint, optionally with innovative bionic tendon made of high tensile, high-tech fibres – low in friction, noiseless, impervious to corrosion and UV resistant
- articulated arms with LED Line option as standard with markilux Bionic tendon at the elbow joint

End caps

- the coverboard end caps are made of high-quality plastic, powder coated
- the front profile and torque bar end caps are made of high-quality plastic, powder coated or in polished chrome

Fixture brackets

- face fixture, top fixture, eaves fixture
- extruded aluminium, powder coated
- pitch range 5°–50°, infinitely adjustable
- spacer plates, stand-off brackets and other accessories are available

Frame and end cap colours

markilux frame colours without surcharge

traffic white, RAL 9016

metallic aluminium, RAL 9006


grey brown, similar to RAL 8019



off-white textured finish, 5233 ¹⁾

stone grey metallic, 5215 ¹⁾

anthracite metallic, 5204 ¹⁾

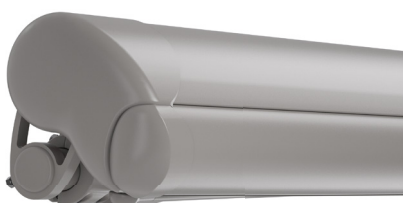



havana brown textured finish, 5229 ¹⁾



off-white textured finish, 5233 ¹⁾ front profile and torque bar end cap in polished chrome

stone grey metallic, 5215 ¹⁾ front profile and torque bar end cap in polished chrome

anthracite metallic, 5204 ¹⁾ front profile and torque bar end cap in polished chrome

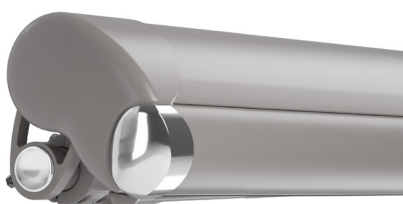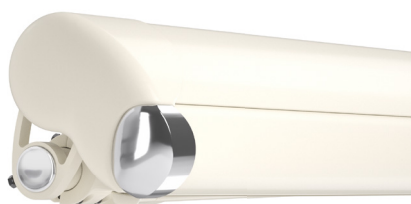

Combination options – possible in any frame colour.

Non-standard powder-coated finish

Bespoke frame colours incur a surcharge – matt, metallic, finely textured and pearl finishes as well as other colour ranges (DB, Tiger etc.) on request. All frame colours are available at a surcharge with enhanced corrosion protection.

Colours may differ slightly from those depicted in both hue and finish.

¹⁾ textured finish

Dimensions and configuration options

Single unit

Order dimensions		Awning width										Minimum widths				
		260	310	360	410	460	510	560	610	660	710 ²⁾					
		174	261	311	361	411	461	511	561	611	661					
H		260	310	360	410	460	510	560	610	660	710					
	150	3)														
	200	3)										187	174	—	190	177
	250	—	3)									237	224	—	240	227
	300	—	—	3)								287	274	—	290	277
	350	—	—	—	3)					1)		337	324	—	340	327
	400 ^{1) 2)}	—	—	—	—	3) 4)	4)	4)	4)	—	3) 4)	387	374	—	390	377
												437	424	687	—	—

Dimensions in cm

- 1) = drop valance not available
 2) = only available with motor drive (surcharge)
 3) = please note the minimum widths!
 4) = meets wind resistance class 1, all other sizes meet wind resistance class 2
 H = projection

-  = 2 folding arms
 2 brackets
 = 2 folding arms
 3 brackets
 = 2 folding arms
 3 brackets, 1 rolltex bearing
 = 3 folding arms
 4 brackets, 2 rolltex bearing

-  = 2 standard arms
 = 2 bespoke arms (surcharge)
 = 3 standard arms

Operation	standard	optional
crank handle	✓	—
spring-assisted crank handle	—	✓
hard-wired motor	—	✓
silentec motor (optionally with an external io / RTS receiver)	—	—
radio-controlled motor io, 868 MHz	—	✓
radio-controlled motor RTS, 433 MHz	—	✓
868 MHz radio-controlled motor io with manual override ¹⁾	—	✓

1) For awnings with a maximum of 2 arms

Coupled awning (only with motor drive)¹⁾

- 2 fields, 1 motor, maximum width 1400 cm
 maximum projection (depending on the width) 400 cm
 junction roller (one-piece cover not available)

1) N.B! Important background information can be found in the chapter "General Information", in the section "Coupled Awnings"

Awning cover	fabric pattern no.	standard	optional
sunvas	300.. - 315..	✓	—
sunsilk	324.. / 328.. / 369..	✓	—
sunbow	411.. - 427..	✓	—
smart art	340..	—	✓
perla FR	371.. / 372..	—	✓
valance, height 20 cm		—	✓

Shadeplus ¹⁾	Standard	Optional
height 210 cm / 180 cm (sunbow)		
maximum awning projection 350 cm ²⁾		
crank handle	✓	—
hard-wired motor ³⁾	—	✓
radio-controlled motor io, 868 MHz ³⁾	—	✓
433 radio-controlled motor RTS ³⁾	—	✓
cover sunvas / sunsilk / sunbow / transolair / vuscreen Alu ⁴⁾ / glass fibre screen Serge 600 ⁵⁾		

1) Only available in plain seamless fabrics (oversized, fabric width >120 cm) or in plains with a horizontal joint (fabric width 120 cm).

2) Not available in awning sizes from [611–660] × 350 cm

3) Height 100 cm, not available with sunbow and Serge 600

4) vuscreen Alu: maximum height 100 cm, only available with manual operation

5) Glass fibre screen Serge 600: maximum height 160 cm

Optional accessories


drop valance, manual or motor operation
folding-arm technology with bionic tendon
valance
wall sealing profile (effective up to a maximum awning pitch of 25°); coverboard when fitted to the markilux panel, in one piece
infrared heater 2500 W
infrared heater 2500 W with integrated radio-controlled receiver 868 MHz io
LED spotline – light bar 110 × 70 mm with 5 W LED spotlights, 180 cm / 3 spots or 300 cm / 5 spots
LED spotline io – light bar 110 × 70 mm with 5 W LED spotlight-integrated dimmable radio-controlled receiver, width 180 cm / 3spots or 300 cm / 5 spots
LED Lines in the folding arms
automatic controls (light, wind, rain)
N.B. Important background information can be found in the chapter “Optional Accessories”.

Fixture options

wall bracket 100 mm	70867.
wall bracket 45 mm	71813.
spreader plate A	75326.
spreader plate B	75325.
markilux panel 250 × 230 × 49 mm	76308.
markilux panel continuous	701104
Vertical fixture rail	62421.
stand-off brackets for face fixture brackets 70867.	77968.
stand-off brackets for face fixture brackets 71813.	77967.
top fixture bracket 90 mm	70868.
top fixture bracket 45 mm	71818.
eaves fixture bracket 90 mm plate 150 mm	75889.
eaves fixture bracket 90 mm plate 270 mm	71659.
flat plate and angled bracket for eaves fixture, machine finish plate 500 mm	716620
supplementary flat backing plate for eaves fixture 260 × 60 × 12 mm	75383.
eaves fixture bracket adjustable from 7,5°–60°	71198.


Lighting options

LED Lines in the folding arms

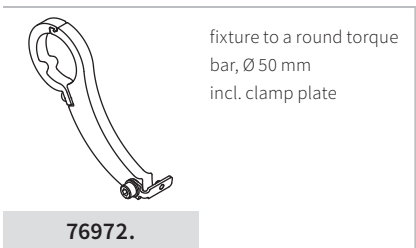

After fitting the awning, the E-box is to be attached on the drive side to the torque bar between the folding arms – it is attached on the bearing side only when the awning has a shadeplus with motor. For coupled awnings, the E-box must be attached in the area near the coupling point.

Power is supplied to the E-box through a cable duct attached to the torque bar.

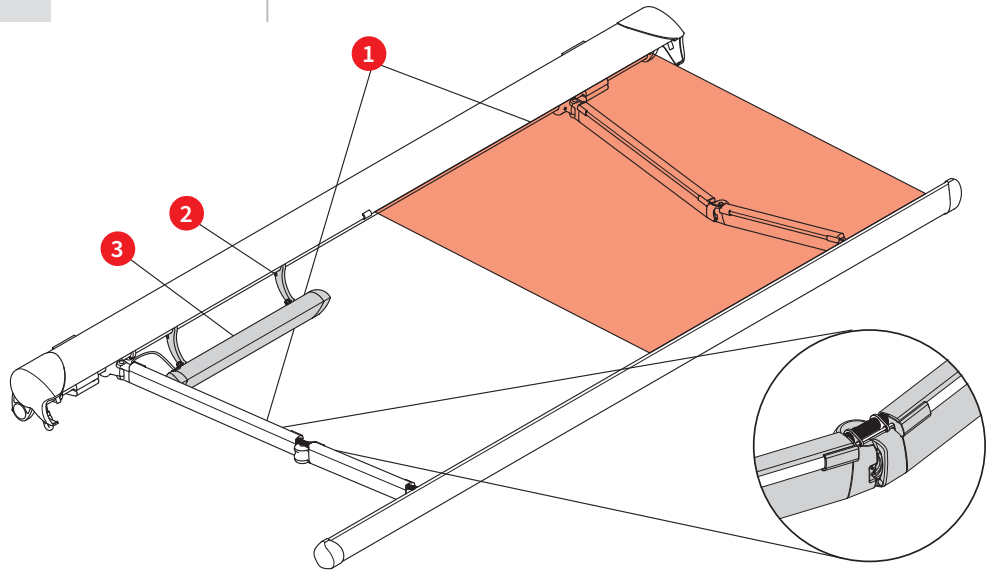


Technical specification

operating voltage	230 V, 50 Hz
power output per metre	8 W / metre
number of LEDs per metre	150 LEDs / metre
light source	LED (12 V)
light temperature	warm white
IP protection class	IP 67
service life	approx. 15.000 h

- 1 = LED Line in the folding arms
- 2 = E-Box bracket (76972.)
- 3 = additional E-Box

Bracket fixture range

Awning with 2 folding arms

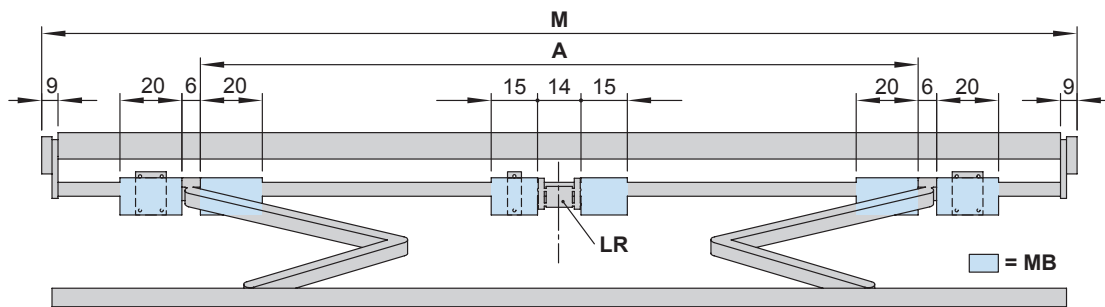

dimensions in cm

Order dimensions		Overall awning width								
		260	310	360	410	460	510	560	610	660
		174	261	311	360	411	461	511	561	611
		260	310	360	410	460	510	560	610	660
		Arm position A								
H	150	154 ¹⁾	220	260	280	330	390	425	460	500
	200	204 ²⁾	204 ¹⁾	260	280	330	390	425	460	500
	250	—	254 ²⁾	254 ¹⁾	280	330	390	425	460	500
	300	—	—	304 ²⁾	304 ¹⁾	330	390	425	460	500
	350	—	—	—	354 ²⁾	370 ¹⁾	390	425	460	500
	400	—	—	—	—	404 ²⁾	425 ¹⁾	425	460	—
BHT		No. of brackets No. of fixing points								
W	4,5	—					1 2		1 2	
	10	2 6					2 6		2 6	
BP		A 2 16 B 2 8					A 2 16 B 2 8		A 2 16 B 2 8	
DP		—					1		1	
PA		2 8					3 12		3 12	
DE	4,5	—					1 2		1 2	
	9	2 8					2 8		2 8	
DA	9	2 8					3 12		3 12	

dimensions in cm

If the brackets cannot be positioned in accordance with this table, make sure the actual dimensions are noted on the order form!

The **pull-out forces** necessary for determining the correct fixing materials necessary to meet wind resistance class 2 (Beaufort 5) can be found in the password-protected dealer area of the pro.markilux.com website under "Pull-out Forces".


- 1) = coupled awnings are available in intermediate widths with a junction roller on request
- 2) = please note the minimum widths! Dimension **A** is only valid for standard arms! In the case of bespoke arms: **A** minus 13 cm. In the case of small awnings the brackets can only be fitted inside the arms, i.e. the position denoted by measurement **A**. Coupled units are not available with a junction roller

A = arm position
BHT = bracket width
BP = spreader plate **A** or **B**, to be positioned behind the folding arm
DA = eaves fixture brackets
DE = top fixture brackets
DP = spacer plate 71826., to be positioned behind the rolltex bearing, in the case of spreader plate **A** or **B**

H = **order dimension** = projection
LR = rolltex bearing
M = **order dimension** = overall awning width
MB = bracket fixture range
PA = markilux panel, fixture profile, width 250 mm
W = face fixture brackets

Bracket fixture range

Awning with 3 folding arms

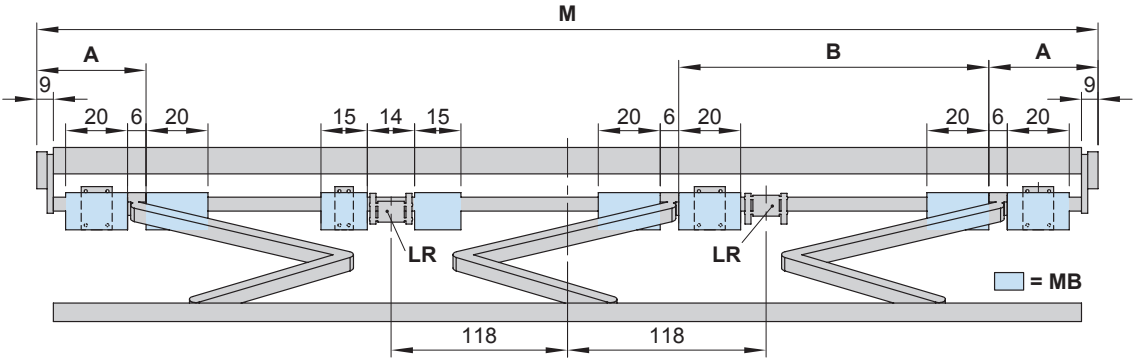

dimensions in cm

Order dimensions

Awning width	
710	
661	
710	

		Arm position	
		A	B
H	150	35	220
	200	35	220
	250	35	220
	300	35	220
	350	25 ¹⁾	230 ¹⁾
	400	17 ¹⁾	229 ¹⁾

BHT		No. of brackets No. of fixing points	
W	4,5	1 2	
	10	3 9	
BP		A 3 24 B 3 12	
DP		1	
PA		4 16	
DE	4,5	1 2	
	9	3 12	
DA	9	4 16	

dimensions in cm

If the brackets cannot be positioned in accordance with this table, make sure the actual dimensions are noted on the order form!


The **pull-out forces** necessary for determining the correct fixing materials necessary to meet wind resistance class 2 (Beaufort 5) can be found in the password-protected dealer area of the pro.markilux.com website under "Pull-out Forces".

- 1) = coupled units are not available with a junction roller
- A = arm position
- BHT = bracket width
- BP = spreader plate A or B, to be positioned behind the folding arm
- DA = eaves fixture brackets
- DE = top fixture brackets

- DP = spacer plate 71826., to be positioned behind the rolltex bearing, in the case of spreader plate A or B
- H = **order dimension** = projection
- LR = rolltex bearing
- M = **order dimension** = overall awning width
- MB = bracket fixture range
- PA = markilux panel, fixture profile, width 250 mm
- W = face fixture brackets


Overall unit height at different pitch settings

Face fixture

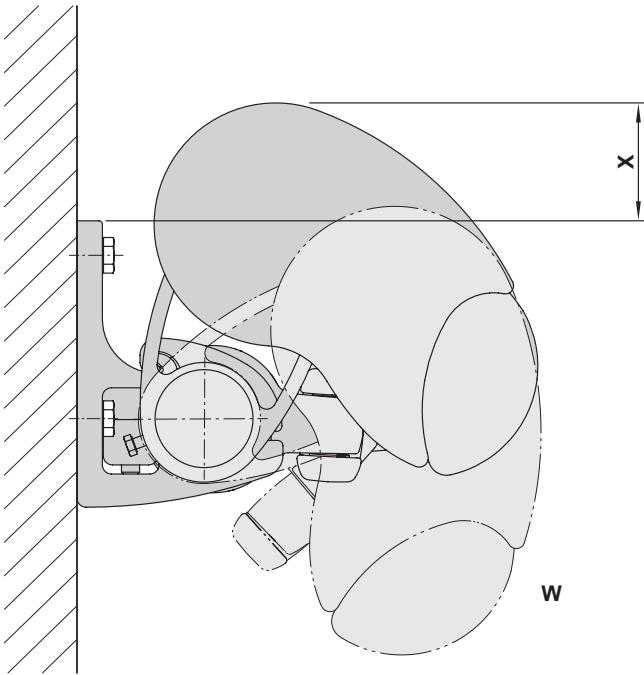

pitch (W)	approx. height in mm (X)
5°	65
10°	64
15°	60
20°	54
25°	48
30°	41
35°	34
40°	26
45°	17
50°	8


Top fixture

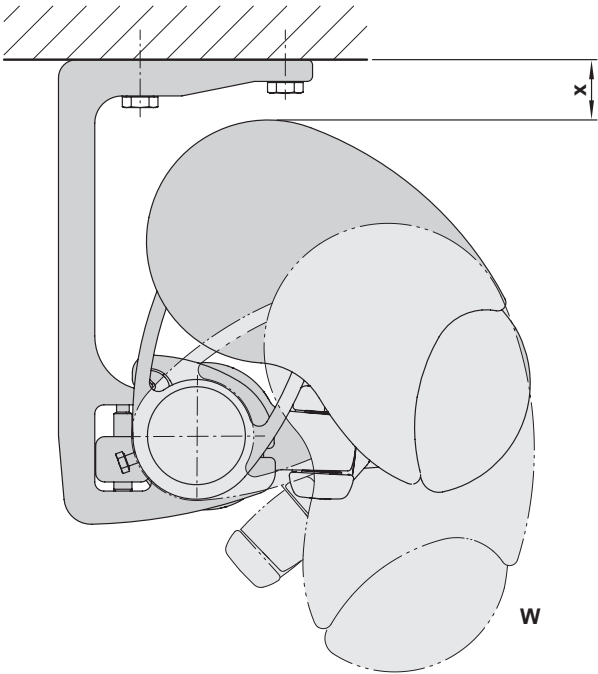

pitch (W)	approx. height in mm (X)
5°	33
10°	34
15°	38
20°	44
25°	50
30°	57
35°	65
40°	73
45°	81
50°	90


Face fixture

Fixtures, fittings and accessories



face fixture bracket
100 mm

70867.



spacer plate
100x 150 x 20 mm; black

N.B!
stack to a max. height of
200 mm


758831



spacer plate for face
fixture
45x 150 x 20 mm; black

N.B!
Stack to a max. height
of 200 mm


718251



face fixture bracket
45 mm

for installation in the
centre, depends on the
width

71813.




spacer plate
100x 150 x 12 mm; black

758841




spacer plate for face
fixture
45 x 150 x 12 mm

71826.



cover plate for spacer
plate and stand-off
brackets in the case of
external insulation
230 x 210 x 2 mm


71843.



cover plate
for spacer plate and
stand-off brackets in
the case of external
insulation

210 x 230 x 2 mm


71844.



wall sealing profile
incl. brush seal

by the metre


76385. and 704241



side cover
wall sealing profile

left and right


60919. and 60920.



reduction bolt

pack 10 pcs

M 16 → M 12 | M 16 → M 10 | M 12 → M 10 | M 10 → M 10






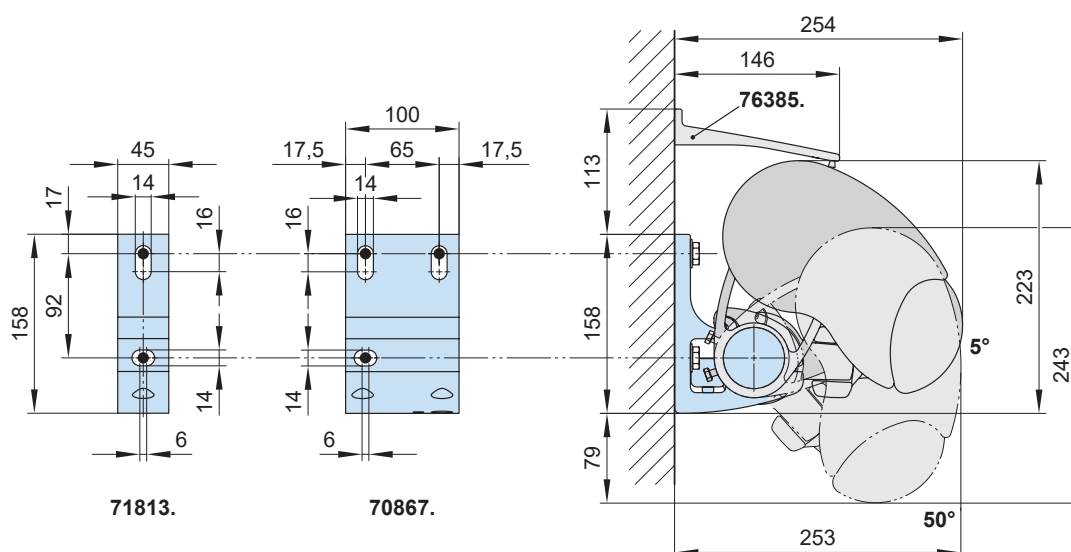



76385. = wall sealing profile (standard width = awning width (M); up to a maximum awning pitch of 25°)

dimensions in mm

Face fixture with spreader plate A

Fixtures, fittings and accessories

 face fixture bracket 100 mm 70867.	 spreader plate A face fixture 430 × 160 × 12 mm 75326.	 face fixture bracket 45 mm for installation in the centre, depends on the width 71813.
 spacer plate for face fixture 45 × 150 × 12 mm 71826.	 wall sealing profile incl. brush seal by the metre 76385. and 704241	 side cover wall sealing profile left and right 60919. and 60920.
 reduction bolt pack 10 pcs M 16 → M 12 M 16 → M 10 M 12 → M 10 M 10 → M 10		







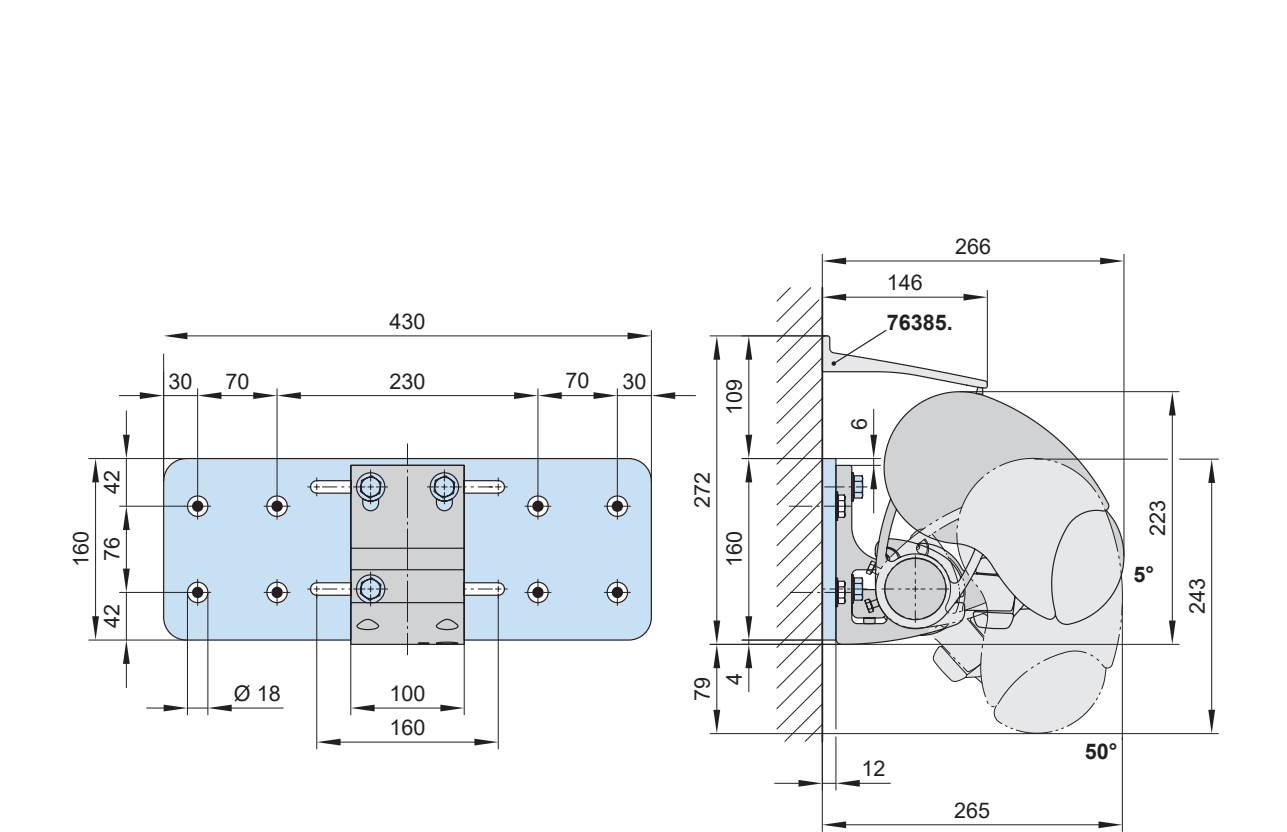



76385. = wall sealing profile (standard width = awning width (M); up to a maximum awning pitch of 25°)

dimensions in mm

Face fixture with spreader plate B

Fixtures, fittings and accessories

	face fixture bracket 100 mm		spreader plate B face fixture 300 × 400 × 12 mm		stand-off strip for wall sealing by the metre
70867.		75325.		751971	
	face fixture bracket 45 mm for installation in the centre, depends on the width		spacer plate for face fixture 45 × 150 × 12 mm		wall sealing profile incl. brush seal by the metre
71813.		71826.		76385. and 704241	
	side cover wall sealing profile left and right		reduction bolt pack 10 pcs		
60919. and 60920.		M 16 → M 12 M 16 → M 10 M 12 → M 10 M 10 → M 10			



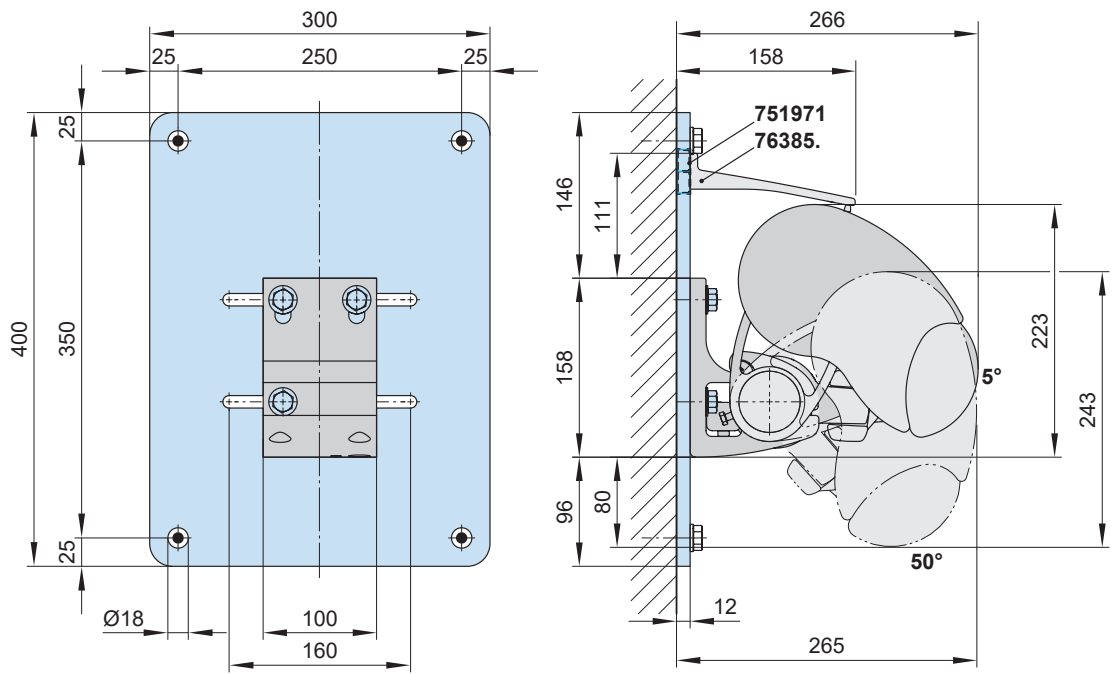



751971 = stand-off strip for wall sealing profile
76385. = wall sealing profile (standard width = awning width (M); up to a maximum awning pitch of 25°)

dimensions in mm

Face fixture using the markilux panel 250 mm wide

Fixtures, fittings and accessories






	markilux panel 250 × 230 × 49 mm with decorative profiles and end caps		face fixture bracket 100 mm		face fixture bracket 45 mm for installation in the centre, depends on the width
76308.		70867.		71813.	

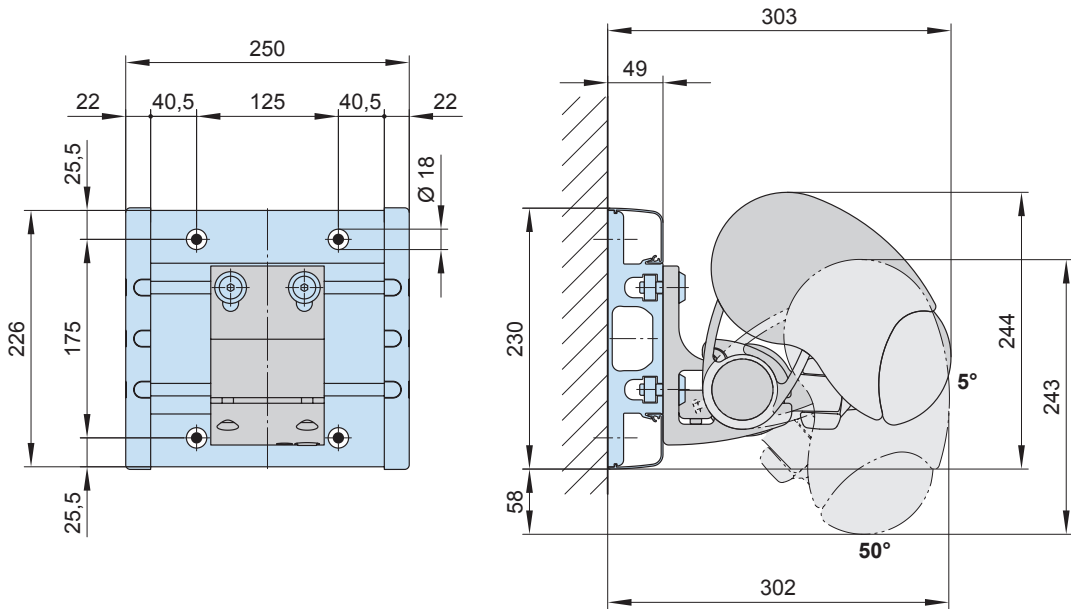


dimensions in mm

Face fixture with markilux panel continuous

Fixtures, fittings and accessories

	markilux panel continuous with decorative profiles and end caps		face fixture bracket 100 mm		face fixture bracket 45 mm for installation in the centre, depends on the width
701104		70867.		71813.	
	bracket coverboard		coverboard incl. additional profile and rubber sealing strip		side cover profile coverboard left and right
76390.		72015., 72019., 75970.		60915. and 60916.	

As a **continuous fixture profile**, the markilux panel will always be supplied to order on the basis of a technical drawing prepared in the factory in accordance with the awning specification. The technical drawing shows the fixture points and pull-out forces and must be approved in writing.

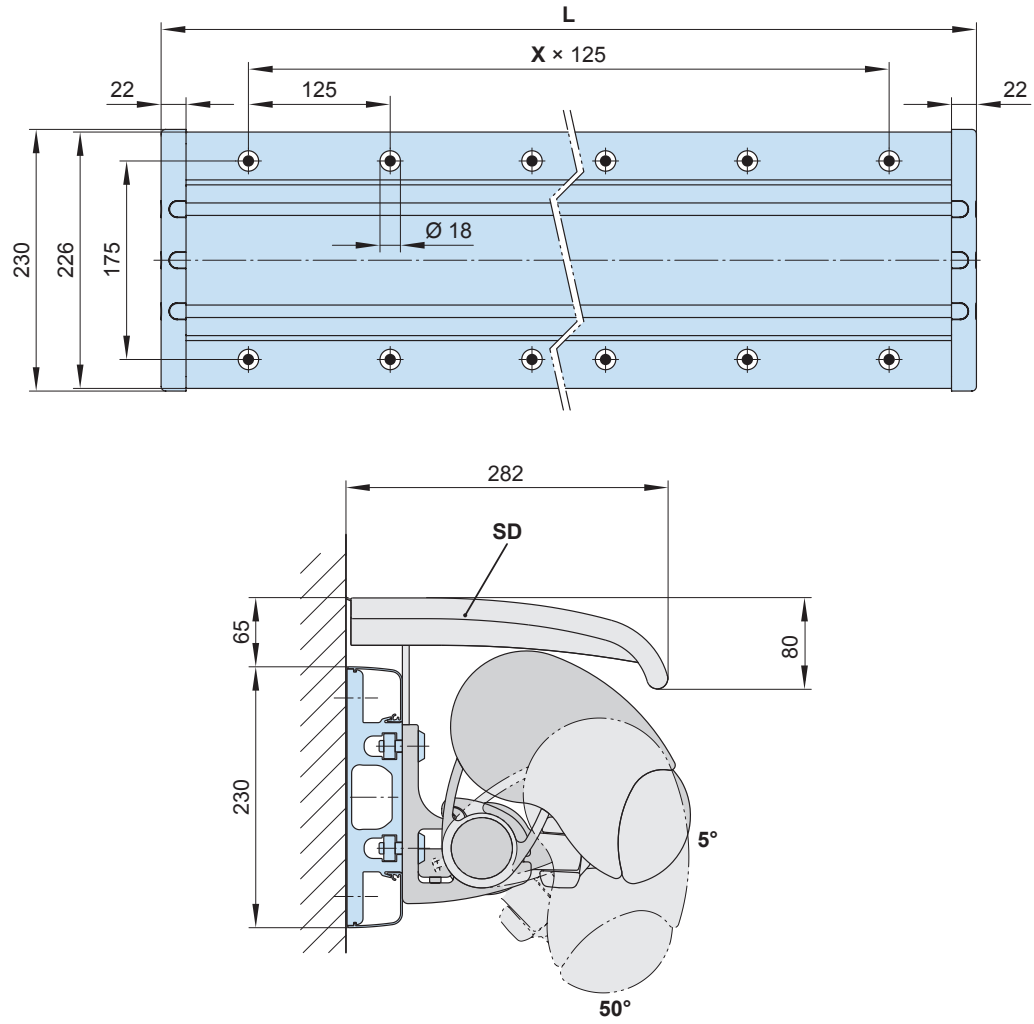

- L = individual width, max. 7000 mm
- SD = coverboard
- x = fixing point separation, **by way of example**

dimensions in mm


Face fixture with vertical fixture rail

Fixtures, fittings and accessories




vertical fixture rail
incl. fixing material
624291

62421.



face fixture bracket
100 mm

70867.




face fixture bracket
45 mm

for installation in the
centre, depends on the
width

71813.

Note: The fixture rail has to be installed with all four of the provided fixtures. The top fixture point has to be exactly behind the awning fixture bracket. The pull-out forces as listed in the separate documentation at pro.markilux.com must be observed!

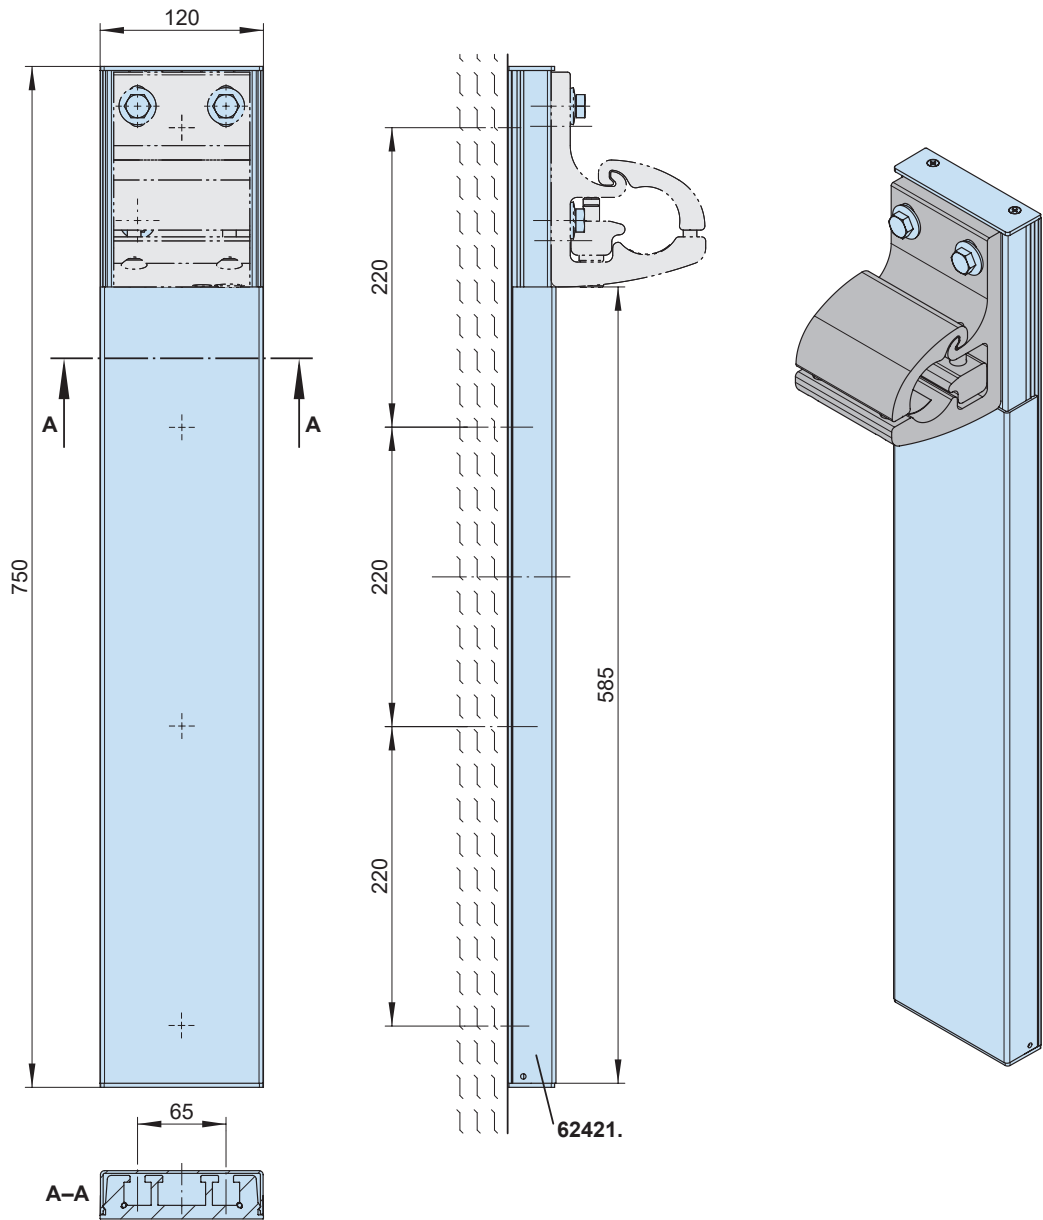


62421. = vertical fixture rail

dimensions in mm


Face fixture with stand-off bracket

Fixtures, fittings and accessories



face fixture bracket
100 mm

70867.




stand-off bracket
for face fixture
bracket 70867.

80–300 mm


incl. insulating element

77968.



cover plate for spacer
plate and stand-off
brackets in the case of
external insulation
230 × 210 × 2 mm


71843.



face fixture bracket
45 mm

for installation in the
centre, depends on the
width


71813.



stand-off bracket
for face fixture bracket

80–300 mm
incl. insulating element


77967.



cover plate
for spacer plate and
stand-off brackets in
the case of external
insulation

210 × 230 × 2 mm



71844.



reduction bolt

pack 10 pcs







M 16 → M 12 | M 16 → M 10 | M 12 → M 10 | M 10 → M 10

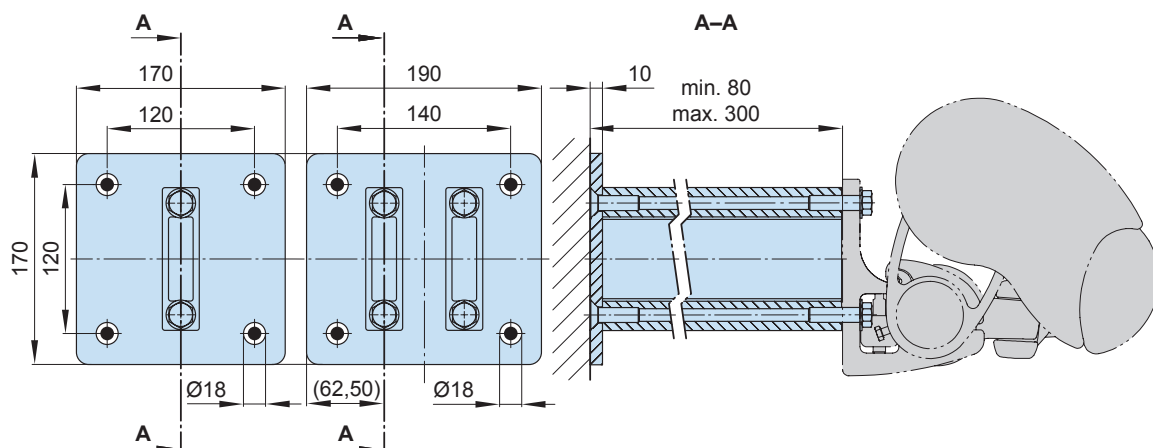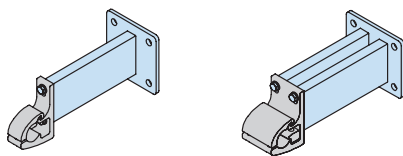


dimensions in mm

Top fixture


Fixtures, fittings and accessories

 top fixture bracket 90 mm 70868.	 spacer plate for top fixture 90x 140 x 20 mm; black N.B! stack to a max. height of 200 mm 716311	 spacer plate for top fixture 90x 140 x 12 mm; black 716411
 top fixture bracket 45 mm additional bracket for 3 folding arms 71818.	 spacer plate for top fixture 45x 140 x 20 mm; black N.B! stack to a max. height of 200 mm 716261	 spacer plate for top fixture 45x 140 x 12 mm; black 716371
 top fixture bracket for central fixture N.B! The pull-out forces are double those of top fixture bracket 70868. 70869.		

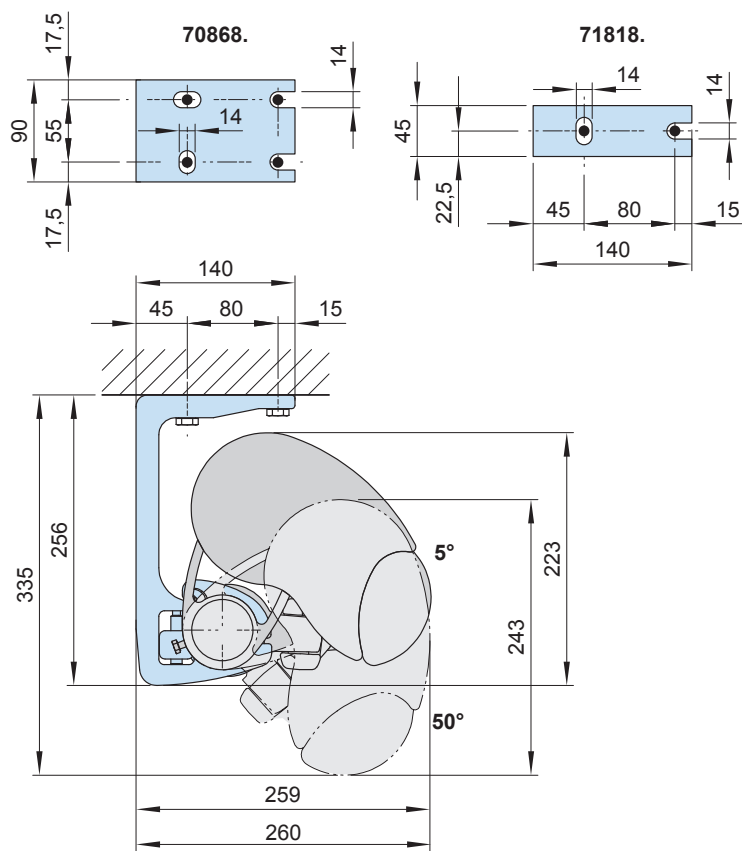

Eaves fixture


Fixtures, fittings and accessories



eaves fixture bracket complete
90 mm


height of flat plate
150 mm

70871.



top fixture bracket
90 mm


70868.



eaves fixture bracket
90 mm

150 mm plate


75889.



eaves fixture bracket
90 mm

height of flat plate
270 mm

71659.





angle and plate for
eaves fixture
height of plate 500 mm

machine finish

716620

Eaves fixture bracket 150 mm (75889.)






Eaves fixture bracket 270 mm (71659.)

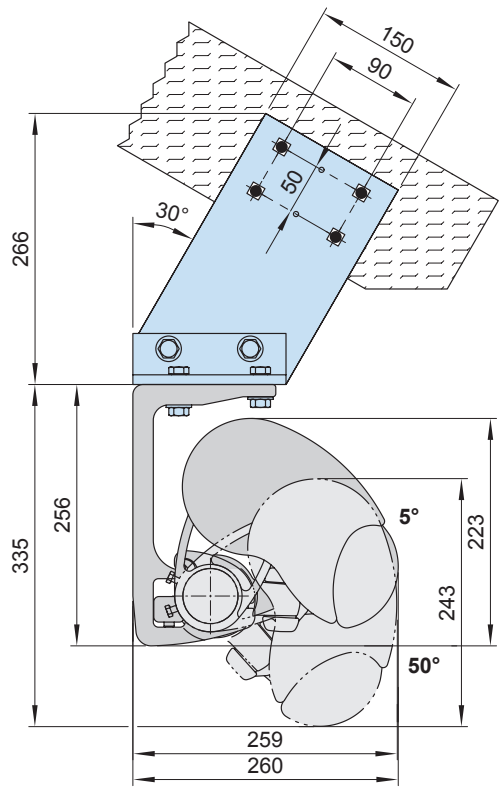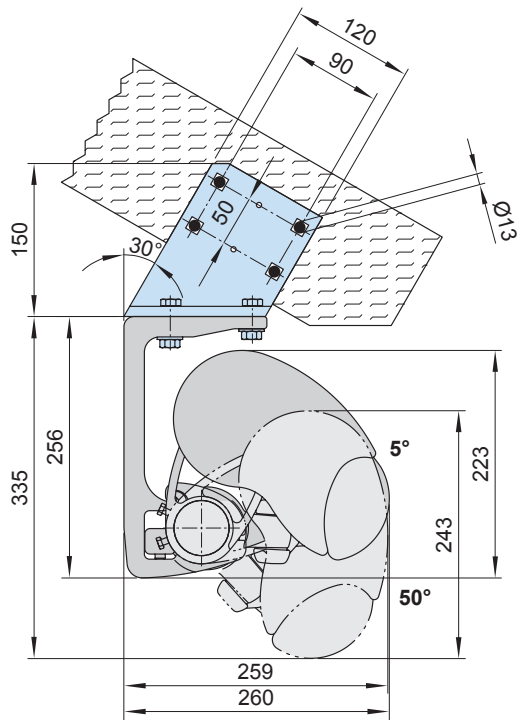

dimensions in mm


Eaves fixture with additional plate

Fixtures, fittings and accessories

 eaves fixture bracket complete 90 mm height of flat plate 150 mm 70871.	 top fixture bracket 90 mm 70868.	 eaves fixture bracket 90 mm 150 mm plate 75889.
 eaves fixture bracket 90 mm height of flat plate 270 mm 71659.	 supplementary flat plate for eaves fixture 260 × 60 × 12 mm 75383.	

Eaves fixture bracket with backing plate for 75889.


Eaves fixture bracket with backing plate for 71659.

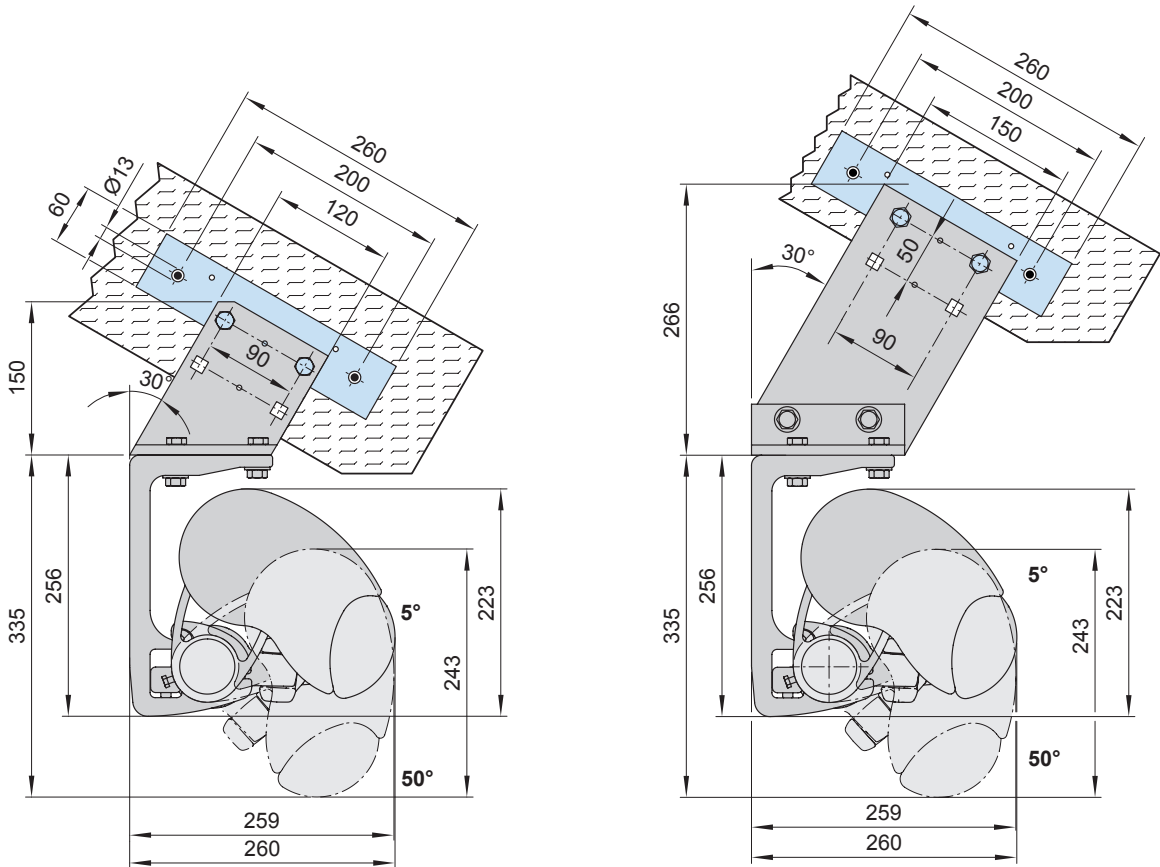

dimensions in mm


Eaves fixture with adjustable eaves fixture bracket

Fixtures, fittings and accessories




top fixture bracket
90 mm

70868.



eaves fixture bracket
adjustable from
15°-60°


71198.

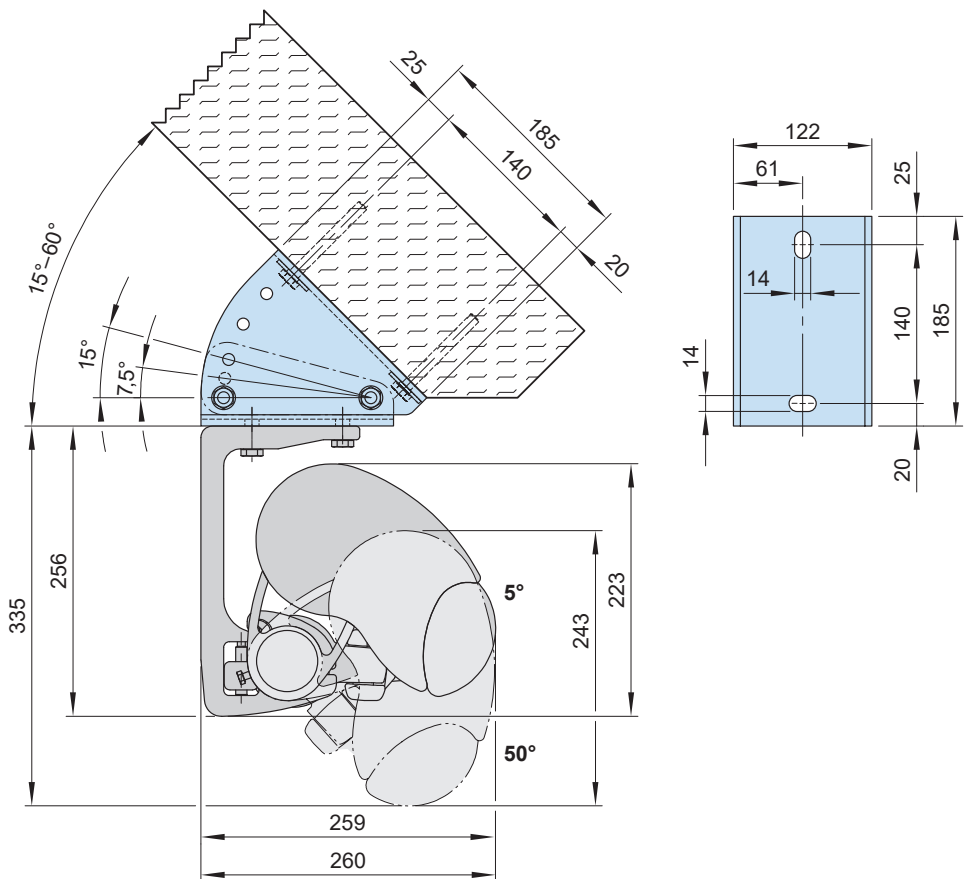


dimensions in mm

Awning with shadeplus

Face fixture

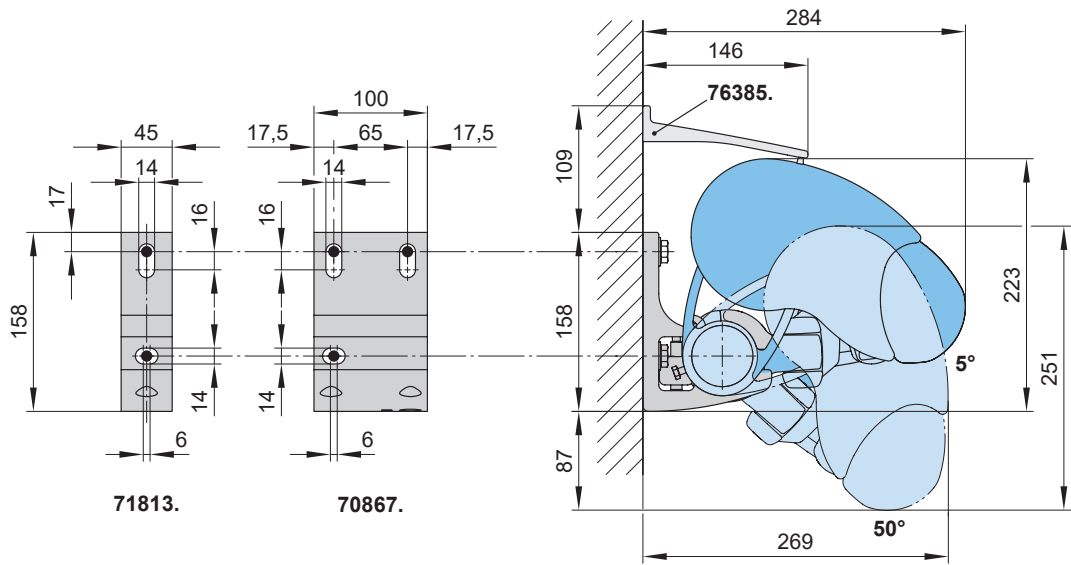

Top fixture

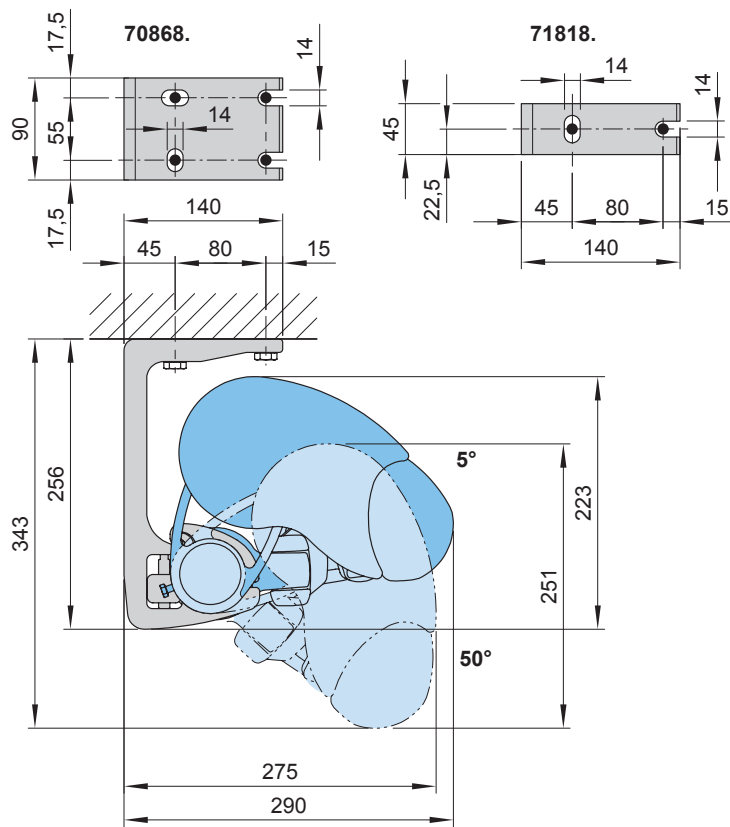


- 70867. = face fixture bracket 100 mm
- 70868. = top fixture bracket 90 mm
- 71813. = face fixture bracket 45 mm
- 71818. = top fixture bracket 45 mm
- 76385. = wall sealing profile (standard width = awning width (M); up to a maximum awning pitch of 25°)


dimensions in mm

Face fixture, manual operation

Gearbox eye positions

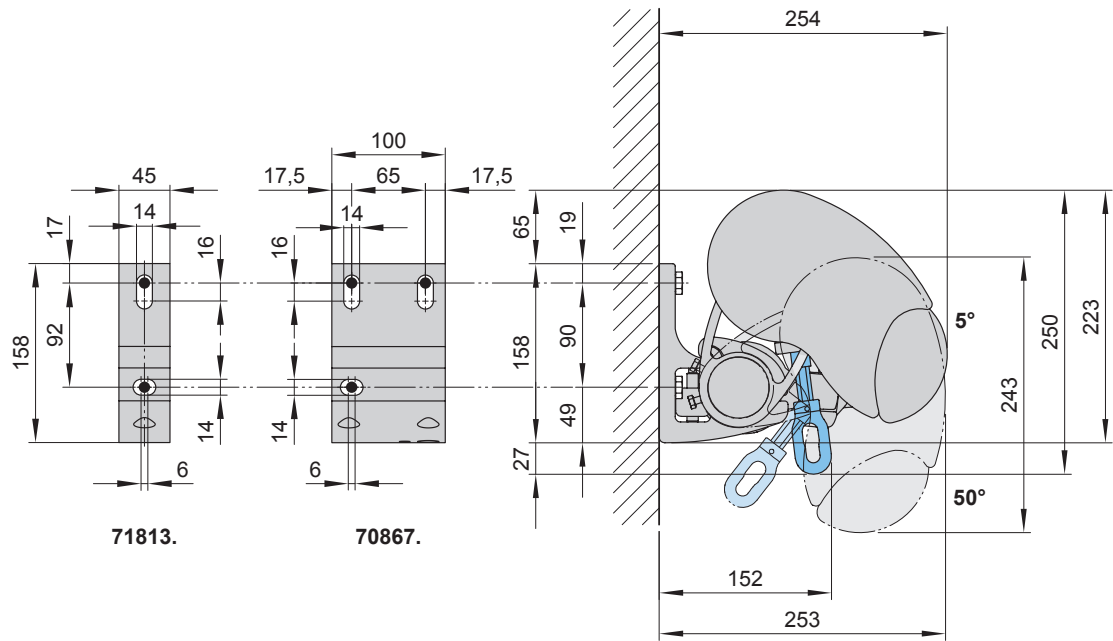


14 Motor cable exit point

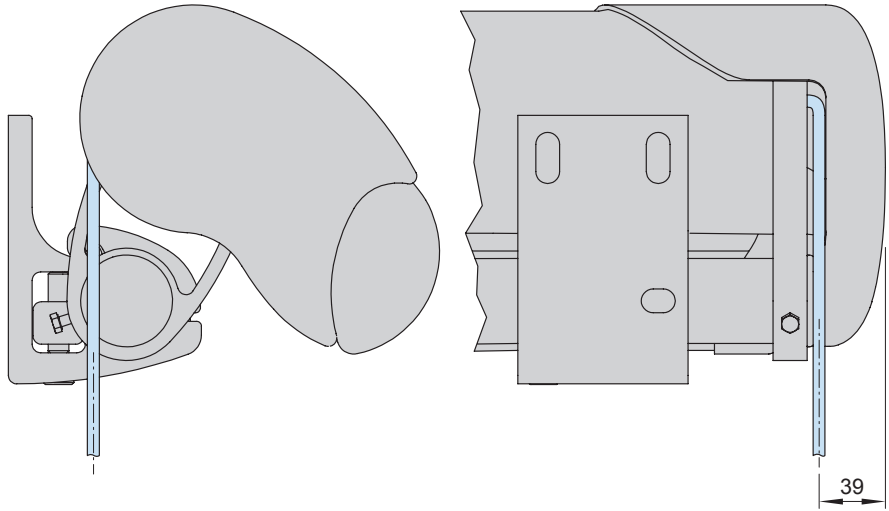

Face fixture, radio-controlled motor with manual override

Gearbox eye positions

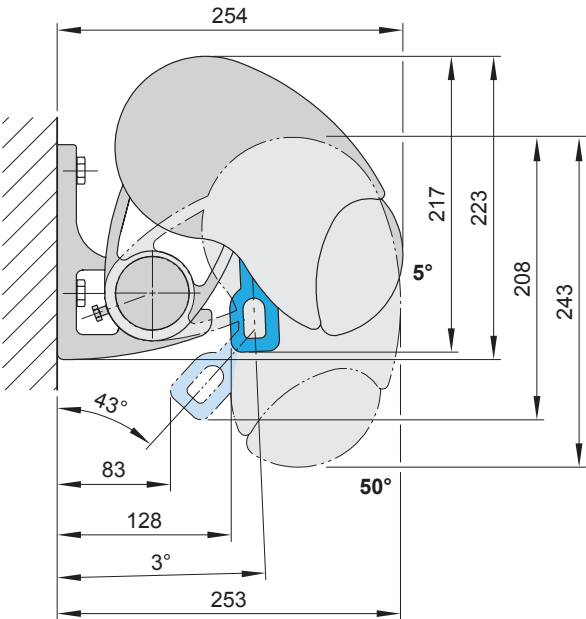

- 01
- 02
- 03
- 04
- 05
- 06
- 07
- 08
- 09
- 10
- 11
- 12
- 13
- 14
- 15
- 16
- 17
- 18
- 19

- 01
- 02
- 03
- 04
- 05
- 06
- 07
- 08
- 09
- 10
- 11
- 12
- 13
-  14
- 15
- 16
- 17
- 18
- 19