




Underglass awning

markilux 679 tracfix


The square underglass awning for large areas.

Product characteristics


Wind resistance class 3
Beaufort 6 → 38–48 km/h → 10.5–13.4 m/s → 24–30 mph

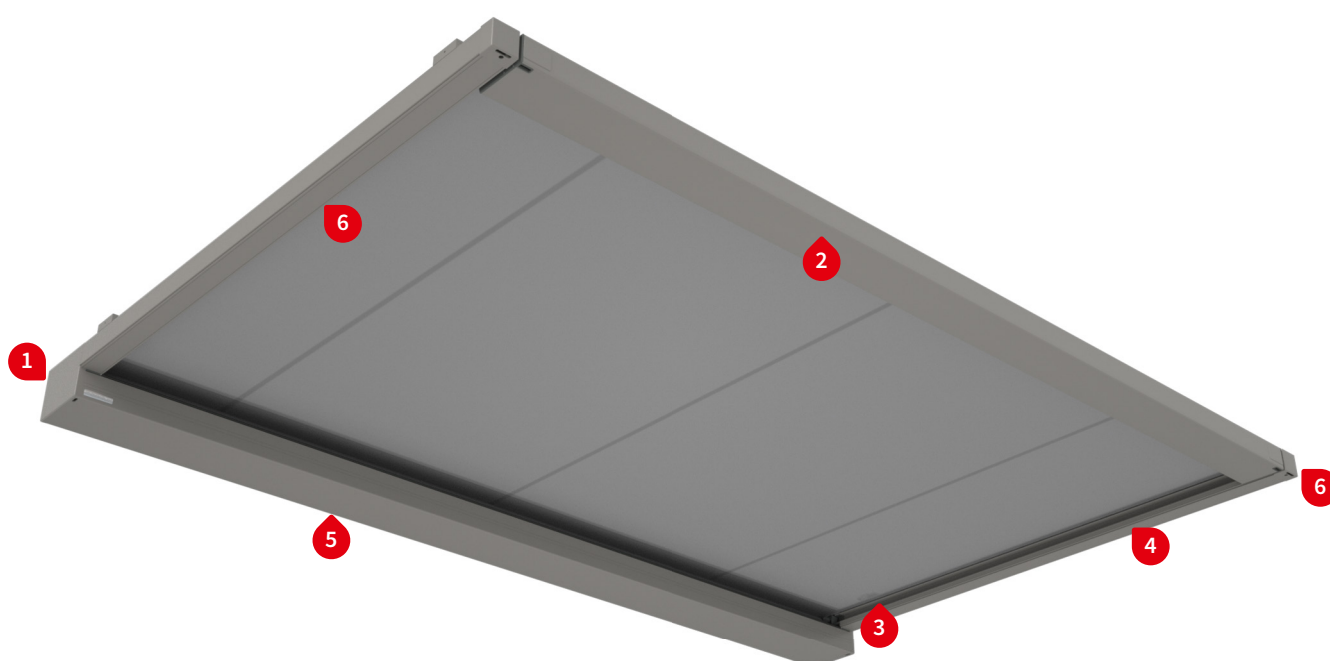


1 side view: motor drive, flat track bracket

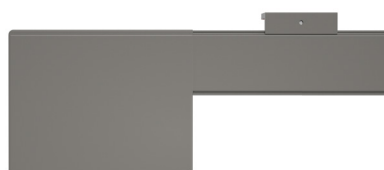

2 shadeplus during extension

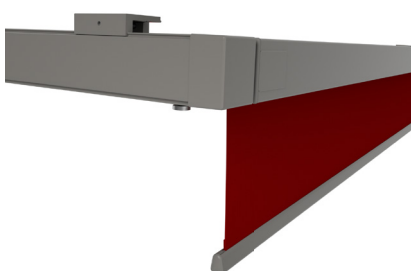


3 tracfix cover guidance – no gap between cover and track ¹⁾

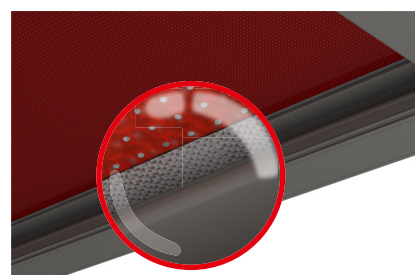


4 LED-Line in the guide track ¹⁾



5 LED-Line in the cassette ¹⁾

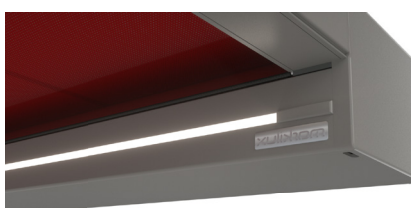

6 harmonious appearance of the front profile and guide tracks

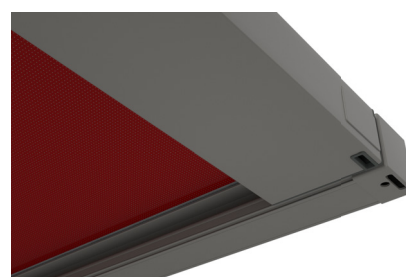

¹⁾ Optional accessories

Product characteristics

Description

- Awning system with lateral guide tracks, tracfix cover guidance system and ingenious tensioning system, offers a projection of up to 6 metres and maximum 32,5 m² shading with one unit

Special features

- fully encompassing cassette that protects the cover perfectly
- tried-and-tested tensioning system with drive belts and integrated gas pistons – delivers optimum cover tension – in any phase of extension
- with tracfix system, the continuous lateral cover guidance system that leaves no gap between the cover and guide tracks
- various lighting combinations available: light strip LED-Line RGB-WW in the cassette, LED-Line RGB-WW in the guide tracks – fully integrated, individual lighting options for a pleasant atmosphere in the evening
- option of shadeplus – integrated vertical protection against the sun and inquisitive glances in the front profile, with manual operation
- systematic angular design with clean lines ensures screwless look with minimum view of technical details

Dimensions

- single unit: 122–650 cm in width, maximum extension 600 cm (depending on the width)
- maximum dimensions width × extension: 500 × 600 cm / 550 × 550 cm / 650 × 500 cm
- intermediate sizes are available

Roller tube and lateral bearings

- round roller tube Ø 95 mm with keyway, galvanised steel – excellent stability, ensures near perfect cover performance even at the largest widths
- bearing die-cast aluminium cloth shaft

Awning profiles

- extruded aluminium, in façade quality, powder coated
- cassette profile in two pieces, square, height × depth 160 mm × 205 mm
- guide tracks angular, 70 mm × 72 mm
- front profile angular, 155 mm × 71 mm

End caps

- the cassette end caps made of die-cast aluminium, powder coated
- guide track end caps made of die-cast aluminium, powder coated

Fixture brackets

- extruded aluminium, powder coated
- cassette is self-supporting on guide tracks
- brackets for the guide tracks: flat track brackets, spacer plates, additional angular bracket for lateral face fixture
- standard bracket height: 20 mm
- other accessories are available

Frame colours

markilux frame colours without surcharge

traffic white, RAL 9016



metallic aluminium, RAL 9006



grey brown, similar to RAL 8019



off-white textured finish, 5233 ¹⁾



stone grey metallic, 5215 ¹⁾



anthracite metallic, 5204 ¹⁾



havana brown textured finish, 5229 ¹⁾



Non-standard powder-coated finish

Bespoke frame colours incur a surcharge – matt, metallic, finely textured and pearl finishes as well as other colour ranges (DB, Tiger etc.) on request. All frame colours are available at a surcharge with enhanced corrosion protection.

Colours may differ slightly from those depicted in both hue and finish.

1) textured finish

Dimensions and configuration options

Single unit

		Awning fixture width										Minimum fixture width		
		150	200	250	300	350	400	450	500	550	600	650	Hard - wired motor	Radio - controlled motor
Order dimensions		122 150	151 200	201 250	251 300	301 350	351 400	401 450	451 500	501 550	551 600	601 650		
Overall width		+ 7										122 ¹⁾	122 ¹⁾	
H	150													
	200													
	250													
	300													
	350													
	400													
	450													
	500													
	550													
600														

Dimensions in cm

Dimensions in cm

1) = 220 cm when fitted with shadeplus manual
210 cm with two lighting options

H = projection

 = 4 brackets

 = 6 brackets

 = 6 brackets
1 stainless steel cover support wire

Operation	Standard	optional
crank handle	—	—
hard-wired motor	—	✓
silentec motor (optionally with external radio receiver io)	—	—
radio-controlled motor io, 868 MHz	✓	—
radio-controlled motor RTS, 433 MHz	—	—

Coupled awnings

not available

Shadeplus	Standard	optional
height depends on fabric pattern, see table "Shadeplus cover"		
awning fixture width minimum 220 cm – maximum 600 cm		
crank handle	✓	—
hard-wired motor	—	—
radio-controlled motor io, 868 MHz	—	—
radio-controlled motor RTS, 433 MHz	—	—

Optional accessories

shadeplus, manual

LED-Line RGB-WW in the cassette

LED-Line RGB-WW in the guide tracks on both sides

infrared heater 2500 W

infrared heater 2500 W with integrated radio-controlled receiver 868 MHz io

automatic controls (light, wind, rain)

For more detailed information, please refer to the chapter "Optional Accessories" in the main catalogue.

Awning cover	fabric pattern no.	Standard	optional
sunvas	300..-315..	✓	—
sunsilk	324.. / 328.. / 369..	✓	—
sunbow	411..-427..	✓	—
smart art	340..	—	✓
perla FR	371.. / 372..	—	✓
perfortex	331.. / 332..	✓	—
transolair	338..	—	✓
transolair (120 cm)	339..	—	✓
Soltis Perform 92	92-..	—	✓

Shadeplus / drop valance cover ¹⁾	fabric pattern no.	Standard	optional	Awning fixture width	height	tailored cloth
sunvas	309.. / 310.. / 311..	✓	—	≤ 600	230	QN
sunsilk	324..	✓	—	≤ 600	230	QN
sunbow	411.. / 414.. / 421.. / 424..	✓	—	≤ 600	230	QN
transolair	338..	—	✓	≤ 600	230	N
transolair (120 cm)	339..	—	✓	≤ 600	230	QN
vuscreen Alu	317..	—	✓	≤ 600	230	N
Soltis Perform 92	92-..	—	✓	≤ 493	230	QN
glass fibre screen Serge 600	272..	—	✓	≤ 600	230	N
perfortex	331.. / 332..	—	—			
perla FR	371.. / 372..	—	—			


1) Shadeplus cover is narrower than the awning cover

N = Seamless

QN = Horizontal seam(s)

Only available in plain seamless fabrics (oversized, fabric width > 120 cm) or in plains with a horizontal joint (fabric width 120 cm)

Lighting options

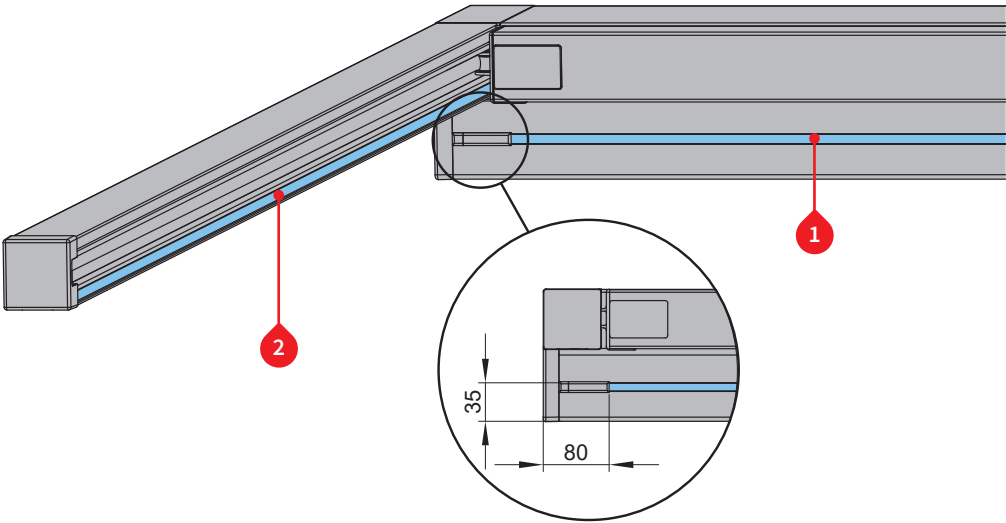

Lighting options

- 1

LED-Line RGB-WW in the cassette ¹⁾
- 2

LED-Line RGB-WW in the guide rails, on both sides ¹⁾

1) Can be controlled as an individual lighting group
For combination possibilities please view section
“Dimension overview lighting options“

Controls

	standard	optional
radio-controlled io (868 MHz)	—	✓
Zigbee	—	✓


Note: When there are several lighting options, one standard control technology must be ordered per awning.

Technical specification

operating voltage	230 V, 50 Hz
power output per metre	11 W / m
light source	LED (24 V)
number of LEDs	144 units / m
number of transformers	1 unit
light temperature	RGB colour light change and warm white
IP protection type	IP 44
service life	approx. 15.000 h


Fixtures, fittings and accessories

flat track bracket
fixture type 10 and 15




60972.

additional angled
bracket for the
bearing, gearbox and
motor sides
80 × 50 × 80 mm
fixture type 15




78720.

accessories
for two angled brackets
78720.




787211

double track bracket flat
2 single units




62314.

spacer plate
double track bracket
flat
80 × 40 × 15 mm



73742.

bracket for cover sup-
port wire



62350.



stainless steel cover
support wire





771401

Overview of dimensions

Track bracket

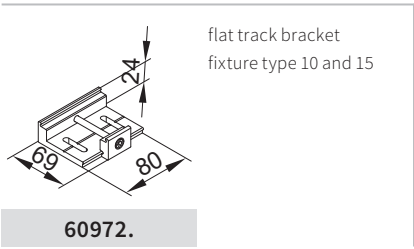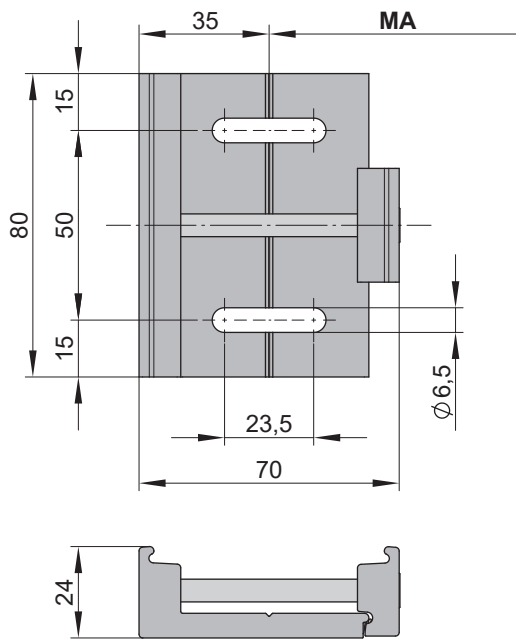

Double track bracket

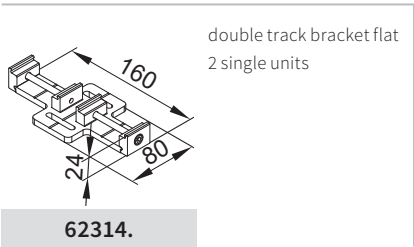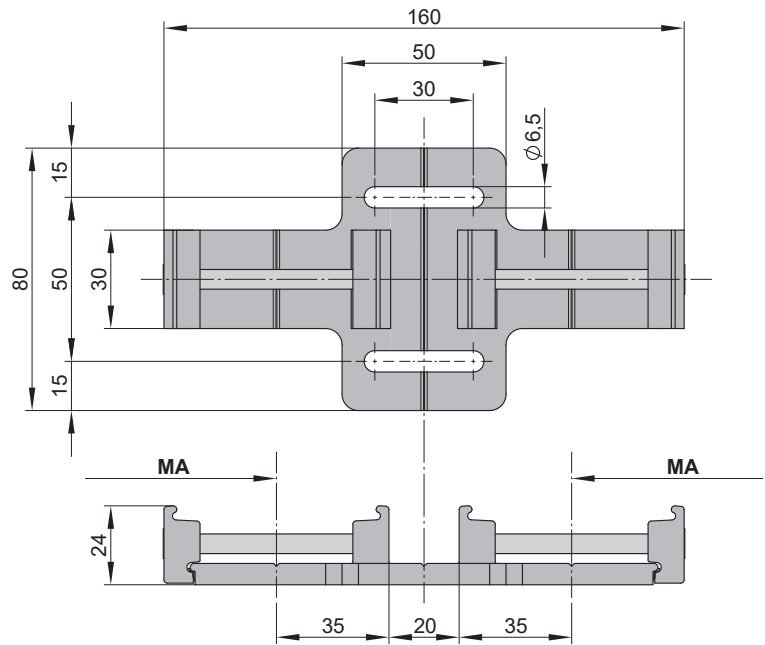


MA = blind fixture width

dimensions in mm

Overview of dimensions


Single unit

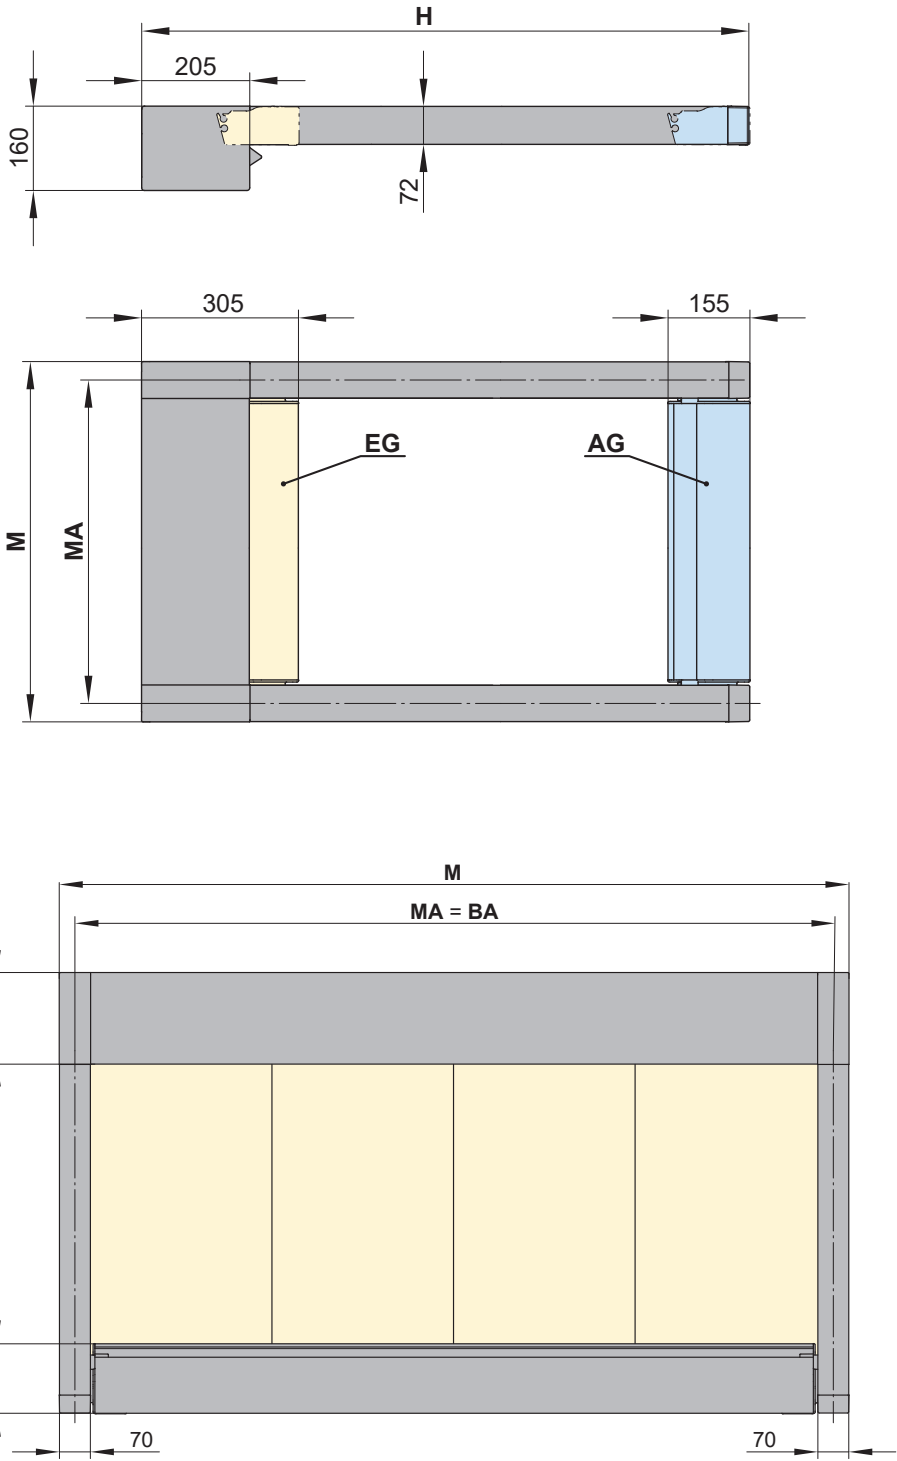

- AG** = extended
- BA** = width between fixture points
- EG** = retracted
- H** = projection
- M** = overall blind width = $MA + 70$ mm
- MA** = blind fixture width

dimensions in mm


Dimension overview fixture combination 10

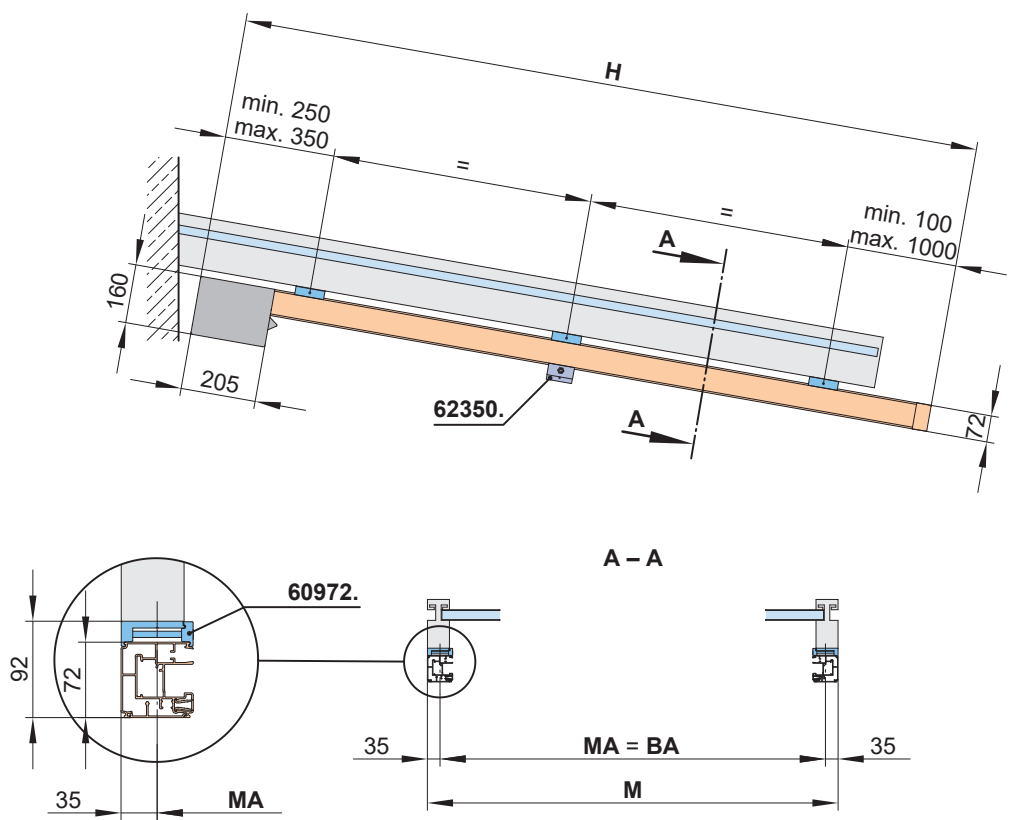

- 60972. = flat track bracket
- 62350. = bracket for cover support wire (depending on its size, included in the delivery)
- BA = width between fixture points
- H = projection
- M = awning width
- MA = blind fixture width

dimensions in mm

Dimension overview fixture combination 15

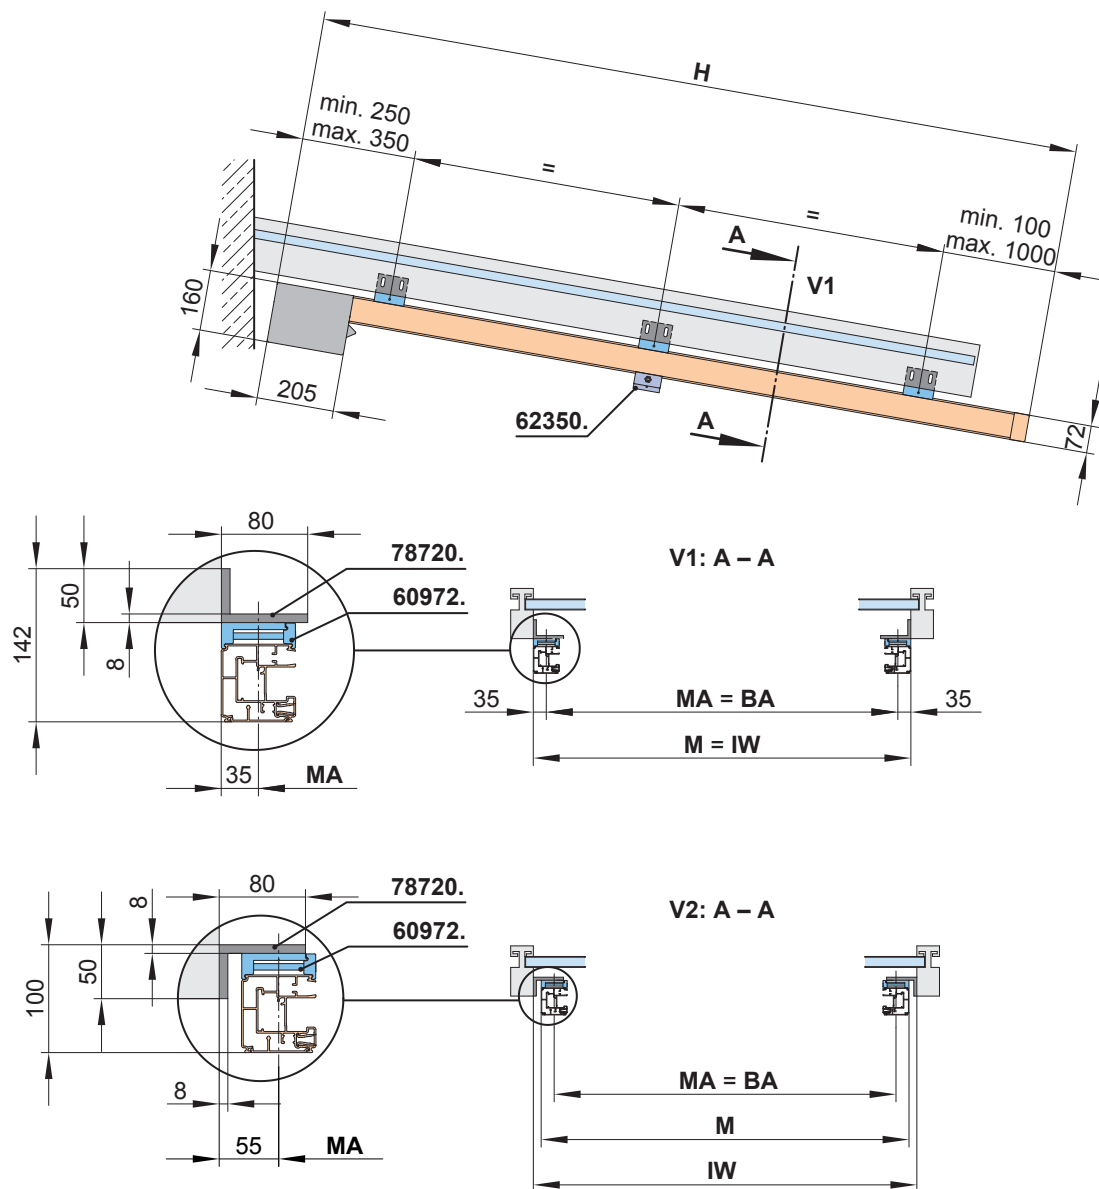


- 60972. = flat track bracket
- 62350. = bracket for cover support wire (depending on its size, included in the delivery)
- 78720. = additional angled bracket
- BA = width between fixture points
- H = projection
- IW = interior conservatory dimension
- M = awning width
- MA = blind fixture width
- V1, V2 = variants

dimensions in mm

Overview of dimensions

Two single units – fixture via double track brackets

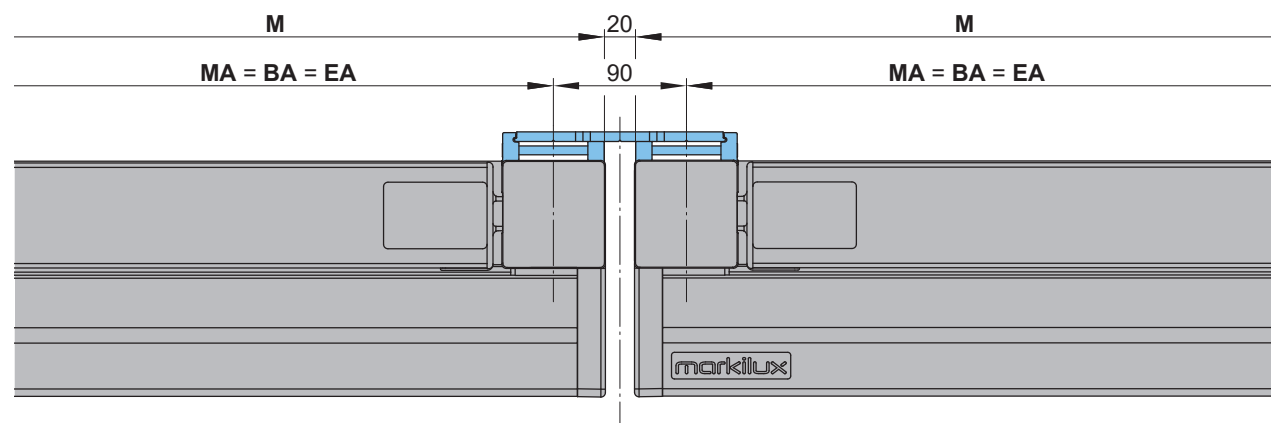


- BA** = width between fixture points
- EA** = single unit
- M** = overall awning width = MA + 70 mm
- MA** = blind fixture width


dimensions in mm

Dimension overview, shadeplus

Magnetic gearbox operation

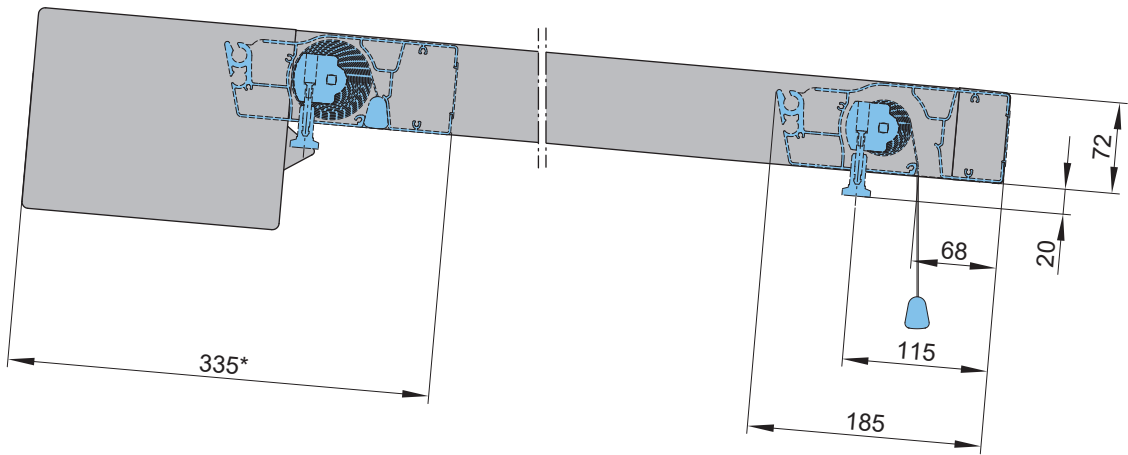

Motor cable exit point ¹⁾

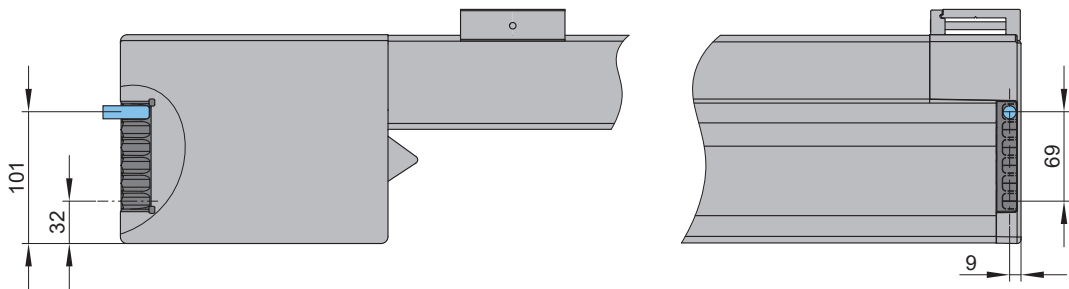


¹⁾ depending on the operation side, left or right

* = extension when retracted


Technical details infrared heater

Overview of dimensions

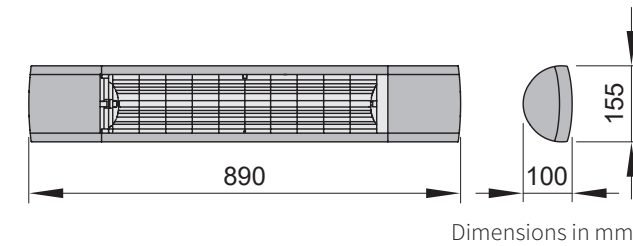


Technical specification

power supply	230 V, 50 Hz, 16 A
power supply wire cross section	H05SS-F2G 3 × 1,5 mm ²
power output (per heater)	2500 Watt
length × depth × height	890 × 100 × 155 mm

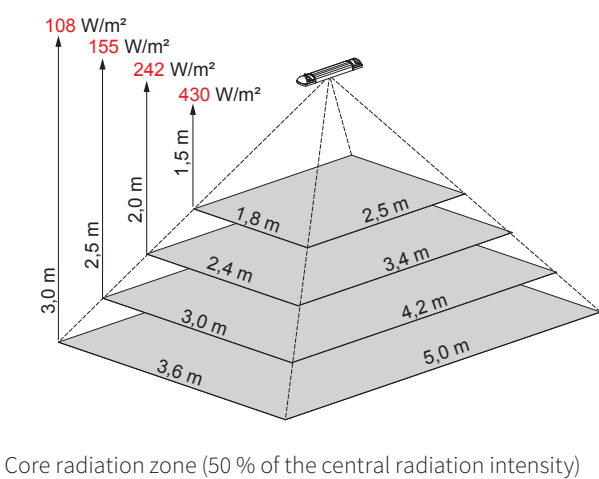


Special features

- soft start function with reduced initial current surge
- cooling fins on the back prevent excessive heating of the mounting surface
- the asymmetrical reflector gives optimum heat distribution
- infrared halogen lamp with “Ultra Low Glare” heating tube technology and pleasant colour temperature
- minimum installation height 1.8 m
- minimum distance to any irradiated object 1 m

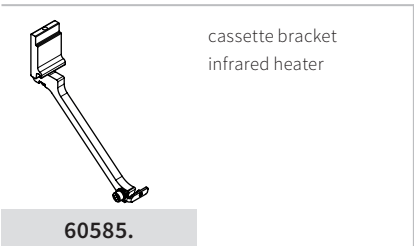


Overview of dimensions, infrared heater

One infrared heater attached to the cassette

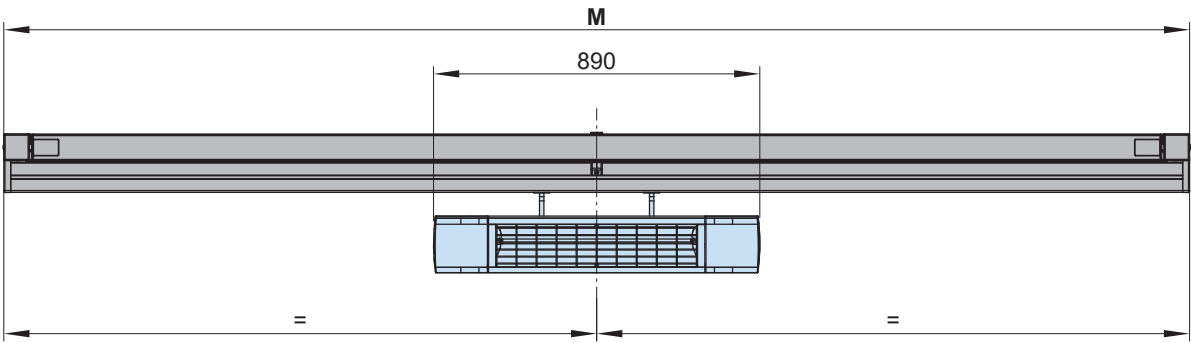

Two infrared heaters attached to the cassette

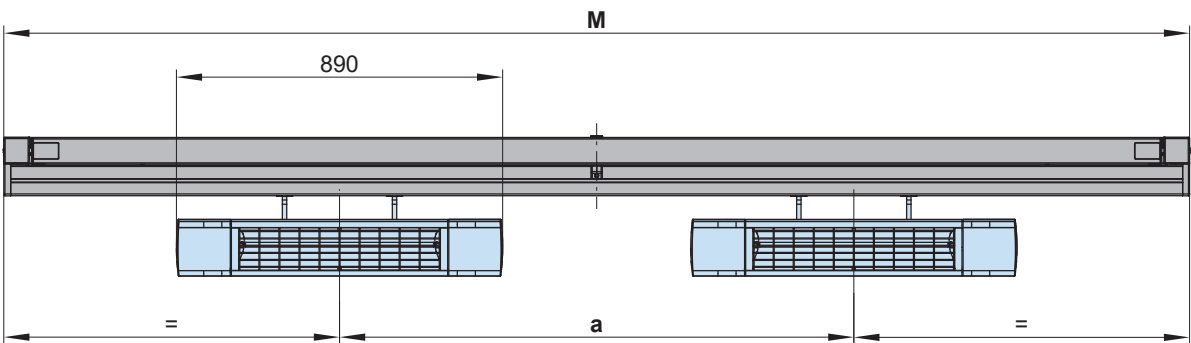


Awning width (M)	301	351	401	451	501	551
	–	–	–	–	–	–
	350	400	450	500	550	600
a in the case of two heaters	150	175	200	225	250	275

dimensions in cm

a = infrared heater separation
M = awning width

dimensions in mm

Dimensions for taking measurements

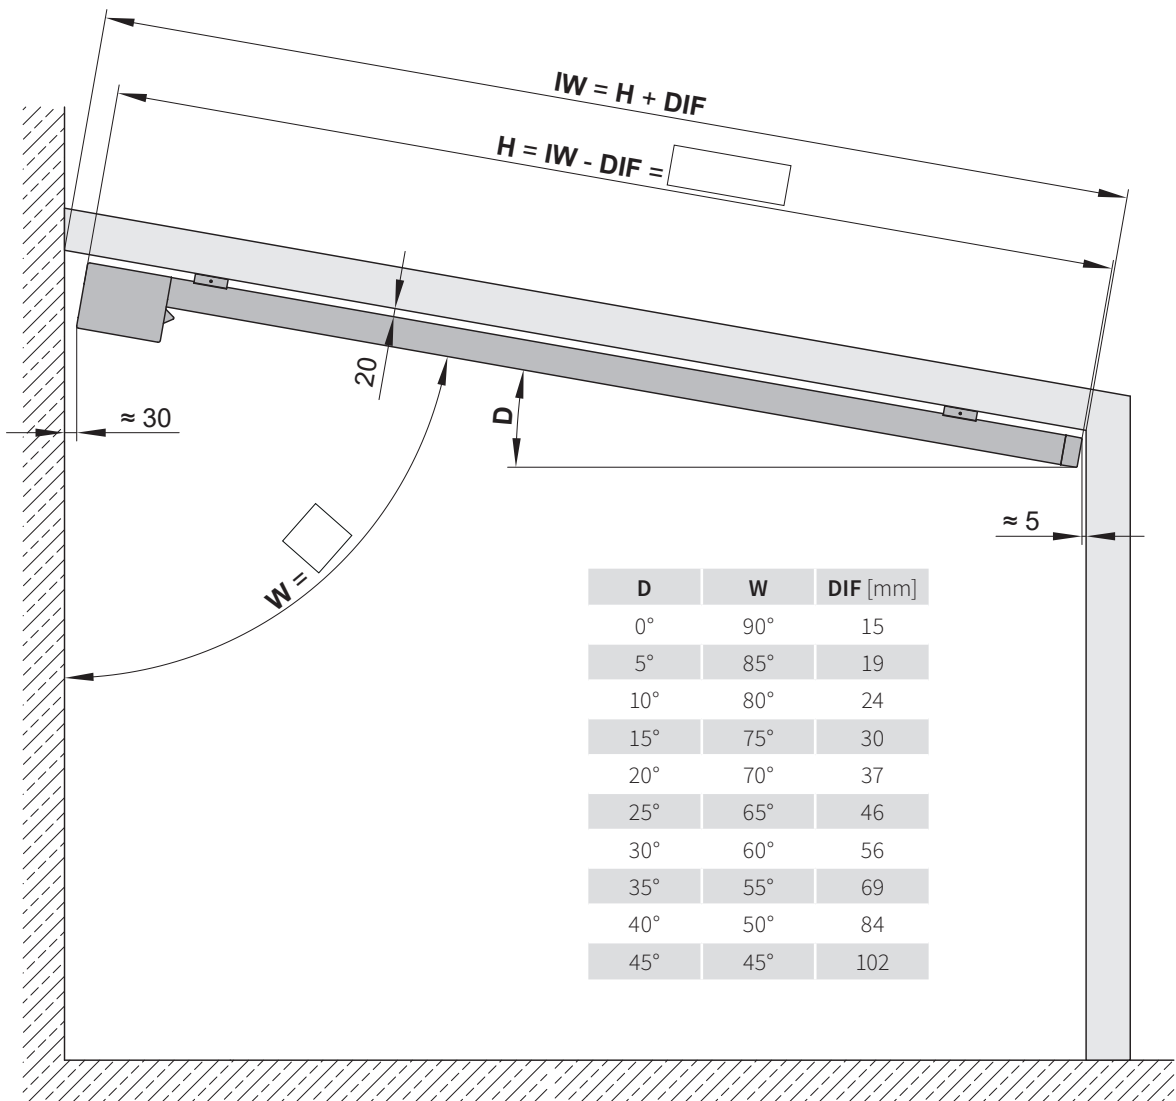

Orders are to be submitted with all the dimensions shown in the diagram!

- D = roof pitch (in °)
- DIF = difference interior conservatory measurement to extension H
- H = **order dimension** = nominal extension = IW – DIF (see table)
- IW = interior conservatory dimension
- W = awning pitch (in °)

dimensions in mm

- 01
- 02
- 03
- 04
- 05
- 06
- 07
- 08
- 09
- 10
- 11
- 12
- 13
- 14
- 15
- 16
- 17**
- 18
- 19
- 20